

**XGT**

**LXT**

**Makita**<sup>®</sup>



CORDLESS MAINTENANCE FOR  
**HEAVY DUTY  
MACHINERY**

[www.makita.be](http://www.makita.be)





Grease gun 12



Vacuum pump 13



Inflator 13



Blower 10



Vacuum sweeper 22



Pressure washer 23

### Mechanical & Specialized Systems

For lubricating mechanical components and servicing specialized air systems.

### Cleaning & surface prep

Essential for clearing grime, mud, and dirt before maintenance.



Angle impact wrench 11



Ratchet wrench 11

### Narrow Spaces & Utility

Designed for accessing and fastening bolts in confined, hard-to-reach areas.

### Undercarriage & chassis

High-torque impact wrenches for loosening and tightening large bolts on tracks, sprockets, and chassis



Impact wrench TW009G 8



Impact wrench TW010G 8



Impact wrench TW001G 9



Impact wrench TW011G 9

### Attachments

For material removal on hydraulic components and attachments.



Demolition hammer 15



Recopro saw 15






Flashlight 26



Barlight 26



Worklight 26



Maktrak 24

### Lighting

A complete system of portable lights for optimal visibility in any situation.

### Transport

Introducing the next generation in modular storage systems



Driver drill 18



Rivet gun 19



Angle grinder GA005G 16



Angle grinder GA038G 16



Die grinder 17



Belt sander 17



Random orbit sander 20



Orbital sander 20



Caulking Gun 19

### Body & frame

Tools for general-purpose fastening, cutting, and shaping on the machine's exterior.

### Cab & Interior

For general cleaning and maintenance of the operator's cab and interior.



Vacuum cleaner 21



Cleaner 21



Polish scrub 22

### Engine Bay

Essential for fastening, light cleaning, and repairs in the engine compartment.



Impact wrench TW005G 10



Impact driver TD004G 18



Heat gun 12



Dust blower 14

# Trucks & trailers

## Fastening & disassembly

Used for wheel changes, chassis, suspension, and brake service. Provides power for loosening large bolts and nuts on heavy-duty components.

TW009G / TW010G	8
TW001G / TW011G	9
TW005G	10
DTL300	11
DWR180	11
DF002G	18
TD004G	18

## Lubrication & fluids

Ensures proper greasing of joints, fifth-wheel couplings, and hydraulic fittings. Also used for air pressure checks and fluid servicing.

GP001G	12
DVP181	13
MP001G	13

## Frame, structure & body work

For grinding, cutting, and general repair of truck frames, brackets, and body panels.

GA038G	16
GA005G	16
JR002G	15
GD001G	17

## Cleaning & maintenance

Used for cleaning filters, radiators, and engine bays, as well as maintaining cabins and undercarriage areas.

AS001G	16
UB001G	16
HW001G	15
VC014G	17
CL001G	17

## Lighting & inspection

Portable lighting for underbody inspection, trailer checks, and night-time service work.

ML007G	14	26
ML012G / DML818	14	26
DML814	23	26
	21	
	21	



Truck & trailer maintenance essentials: TW010G, TW005G, DTL300, GP001G, MP001G, GA005G, AS001G, UB001G, HW001G, DML814

# Agricultural machinery

## Fastening & disassembly

Used for drivetrain, wheel, and implement maintenance. Handles high-torque bolts on axles, joints, and frame connections.

TW009G / TW010G	8
TW001G / TW011G	9
TW007G / TW005G	10
DTL300	11
DWR180	11
DF002G	18
TD004G	18

## Lubrication & fluids

Essential for greasing pivot points, PTO shafts, and hydraulic couplers. Also supports tyre and air system maintenance.

GP001G	12
DVP181	13
MP001G	13

## Frame, structure & body work

For sharpening, repairing, or fabricating parts of frames, loader arms, and attachments.

TW007G	10
HM001G	15
JR002G	15
GA038G / GA005G	16
GD001G	17
DBS180	17

## Cleaning & maintenance

Cleans radiators, filters, cabins, and engine compartments after fieldwork to prevent overheating and wear.

AS001G	14
UB001G	15
HW001G	15
VC014G	21
CL001G	21

## Lighting & inspection

Provides illumination for field service, barn repairs, and night-time machinery checks.

ML007G	14	26
ML012G / DML818	14	26
DML814	23	26
	21	
	21	



Agricultural maintenance essentials: TW010G, TW007G, TW001G, GP001G, HM001G, GA005G, AS001G, HW001G, DML814

Tabless technology

# High output batteries



Check video



Check video

40 V max XGT  
**BL4040F** 4,0 Ah

40 V max XGT  
**BL4080H** 8,0 Ah

**35%** MORE POWER

**31%** COOLER RUNNING

## Battery cell comparison



# THE POWER OF INNOVATION

### TABLESS CELL DESIGN

#### Stronger, smarter and cooler

Without traditional tabs, current flows through multiple paths, reducing resistance and heat. The result — powerful, consistent performance.

- ▶ Shorter current path for efficient energy flow
- ▶ Runs cooler under continuous load
- ▶ Up to **35% more power** for high-demand applications
- ▶ Designed for sustained performance in demanding use

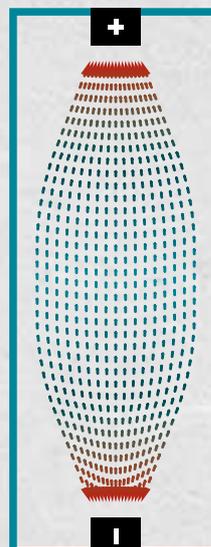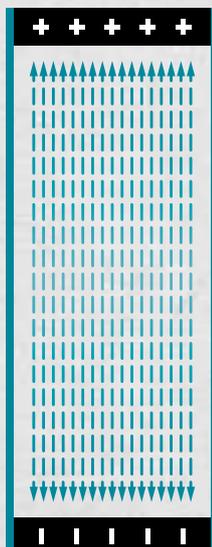

### TABBED CELL DESIGN


#### Balanced power

The established cell layout provides stable output and wide tool compatibility, delivering dependable performance across diverse tasks.

- ▶ Traditional structure with steady energy delivery
- ▶ Optimised for versatile, all-around applications
- ▶ Compatible with the entire XGT range
- ▶ Reliable power for everyday and intensive use

# 40 V max - XGT batteries and chargers

# Maximum power

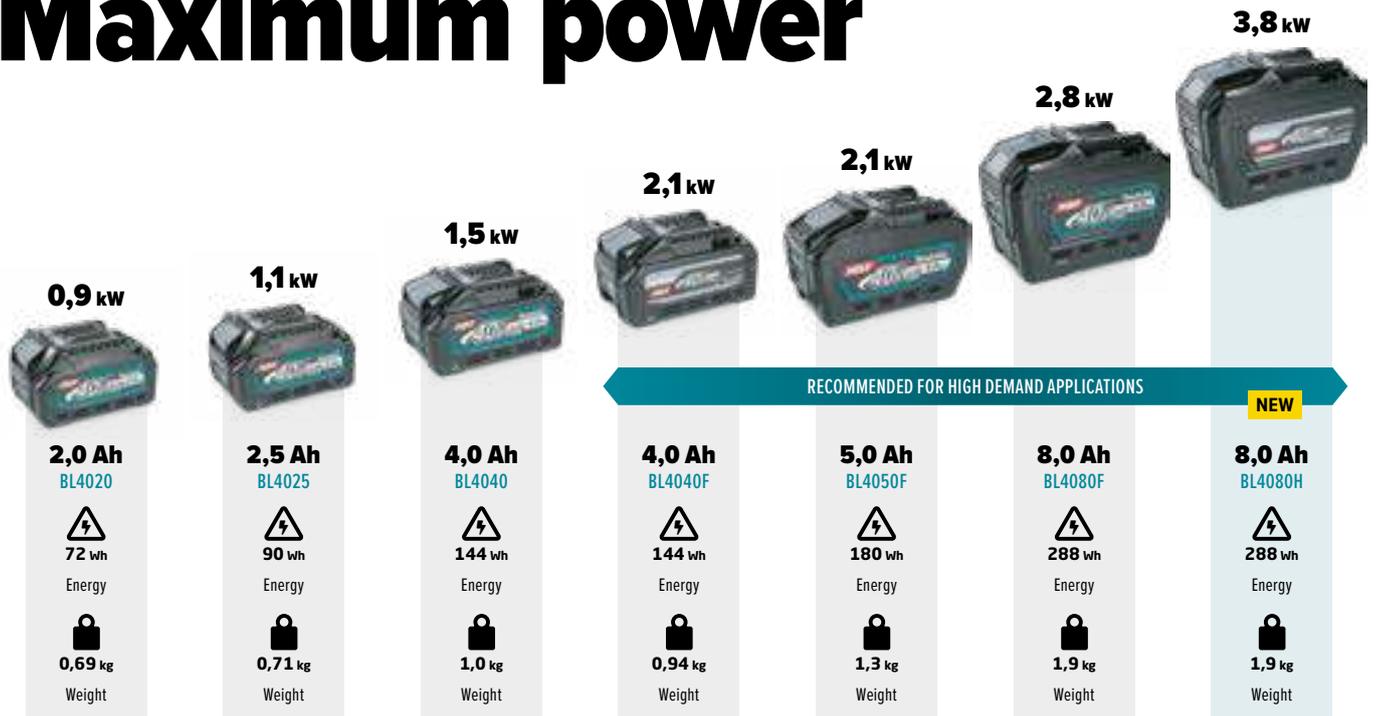


◀ COMPACT SIZE

LONGER RUN TIME ▶



## XGT DC40RA

40 V max - XGT rapid charger



- ▶ Built-in chip optimizes charging by controlling current, voltage, and temperature in real time
- ▶ Two cooling fans which cool the battery and charging circuit for faster charging
- ▶ With ADP10 adapter, supports rapid charging of LXT 18 V batteries

### Charging times for one battery

BL4020 / 2,0 Ah	22 min
BL4025 / 2,5 Ah	28 min
BL4040 or BL4040F / 4,0 Ah	45 min
BL4050F / 5,0 Ah	50 min
BL4080F or BL4080H / 8,0 Ah	76 min

## XGT DC40RB

40 V max - XGT dual rapid charger




- ▶ Built-in chip optimizes charging by controlling current, voltage, and temperature in real time
- ▶ Three cooling fans which cool the battery and charging circuit for faster charging
- ▶ With ADP10 adapter, supports rapid charging of LXT 18 V batteries

### Simultaneous charging times for two batteries

BL4020 / 2,0 Ah	22 min
BL4025 / 2,5 Ah	28 min
BL4040 or BL4040F / 4,0 Ah	45 min
BL4050F / 5,0 Ah	50 min
BL4080F or BL4080H / 8,0 Ah	76 min

## XGT DC40RC

40 V max - XGT charger




- ▶ Built-in chip optimizes charging by controlling current, voltage, and temperature in real time
- ▶ With cooling fan which circulates the air through the battery for faster charging
- ▶ With ADP10 adapter, supports rapid charging of LXT 18 V batteries

### Charging times for one battery

BL4020 / 2,0 Ah	30 min
BL4025 / 2,5 Ah	38 min
BL4040 or BL4040F / 4,0 Ah	67 min
BL4050F / 5,0 Ah	85 min
BL4080F or BL4080H / 8,0 Ah	170 min

## XGT DC40WA

40 V max - XGT dual charger



- ▶ Can be mounted on the wall
- ▶ LED charging / error indicator

### Simultaneous charging times for two batteries

BL4020 / 2,0 Ah	110 min
BL4025 / 2,5 Ah	130 min
BL4040 or BL4040F / 4,0 Ah	210 min
BL4050F / 5,0 Ah	260 min
BL4080F or BL4080H / 8,0 Ah	420 min

## XGT ADP12

40 V Max - XGT® communication adapter

- ▶ ADP12 connects XGT machines, batteries, mobile devices, and PCs for effortless data sharing. It also features anti-theft protection, a handy notepad, and a battery timer.



PIN lock tool & battery

Track tool & battery usage history

Schedule operating time


Bulk change settings

Store important information




# 18 V - LXT batteries and chargers

## Extended runtime

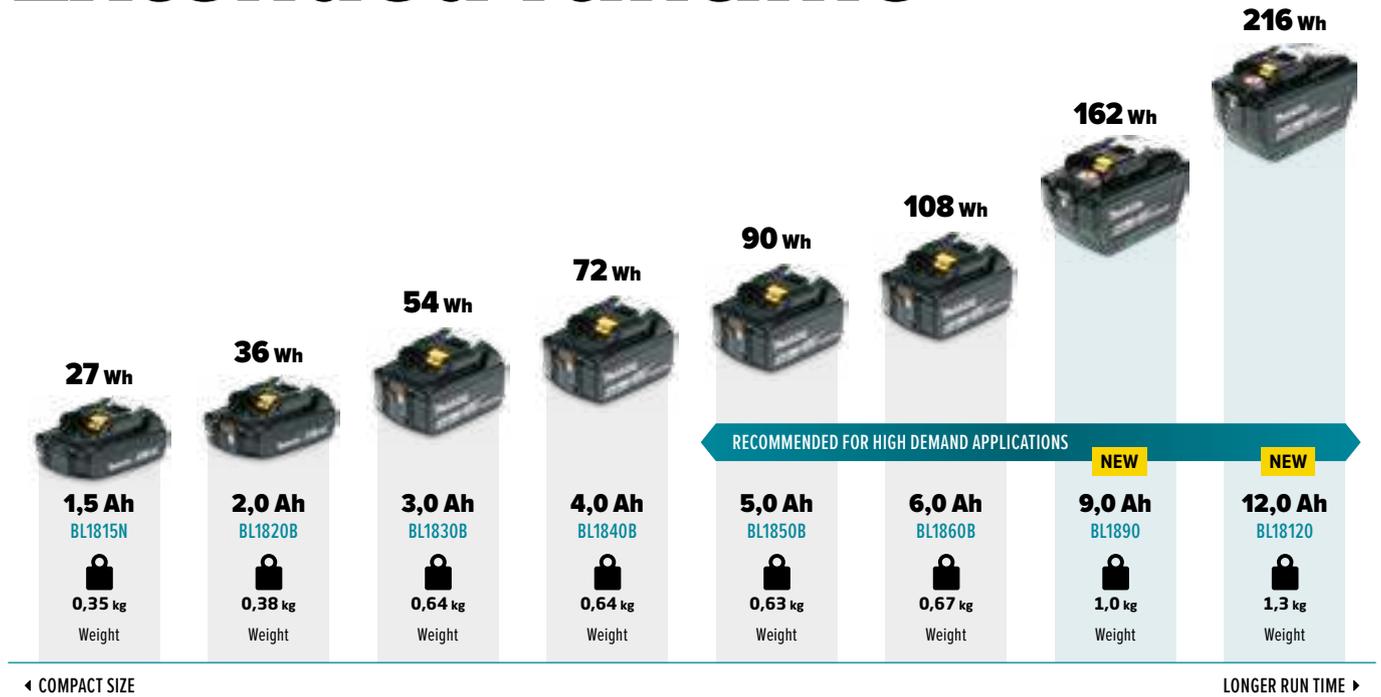

**LXT**  
**DC18RC**

18 V - LXT rapid charger



- Communicates with battery chip to optimize charging and extend battery life
- With cooling fan which circulates the air through the battery for faster charging


**Charging times for one battery**

BL1815N / 1,5 Ah	15 min
BL1820B / 2,0 Ah	24 min
BL1830B / 3,0 Ah	22 min
BL1840B / 4,0 Ah	36 min
BL1850B / 5,0 Ah	45 min
BL1860B / 6,0 Ah	55 min
BL1890 / 9,0 Ah	85 min
BL18120 / 12,0 Ah	120 min



**LXT**  
**DC18RD**

18 V - LXT dual rapid charger



- Communicates with battery chip to optimize charging and extend battery life
- Two cooling fans which cool the battery and charging circuit for faster charging

**Simultaneous charging times for two batteries**

BL1815N / 1,5 Ah	15 min
BL1820B / 2,0 Ah	24 min
BL1830B / 3,0 Ah	22 min
BL1840B / 4,0 Ah	36 min
BL1850B / 5,0 Ah	45 min
BL1860B / 6,0 Ah	55 min
BL1890 / 9,0 Ah	85 min
BL18120 / 12,0 Ah	120 min



**LXT**  
**DC18SD**

18 V - LXT charger



- Communicates with battery chip to optimize charging and extend battery life

**Charging times for one battery**

BL1815N / 1,5 Ah	30 min
BL1820B / 2,0 Ah	45 min
BL1830B / 3,0 Ah	60 min
BL1840B / 4,0 Ah	90 min
BL1850B / 5,0 Ah	110 min
BL1860B / 6,0 Ah	130 min
BL1890 / 9,0 Ah	200 min
BL18120 / 12,0 Ah	270 min



**LXT**  
**DC18SH**

18 V - LXT dual charger



- Communicates with battery chip to optimize charging and extend battery life

**Simultaneous charging times for two batteries**

BL1815N / 1,5 Ah	30 min
BL1820B / 2,0 Ah	45 min
BL1830B / 3,0 Ah	60 min
BL1840B / 4,0 Ah	90 min
BL1850B / 5,0 Ah	110 min
BL1860B / 6,0 Ah	130 min
BL1890 / 9,0 Ah	200 min
BL18120 / 12,0 Ah	270 min

**LXT**  
**BPS01**

18 V - LXT Sync lock battery terminal

- Time-based battery lock with PIN authentication restricts use to specific days and hours
- Configurable via NFC on a smartphone or by USB cable on a desktop or laptop computer



- PIN lock Battery
- Schedule operating time
- Registration user name



## Accessories for 1" impact wrenches



**E-24511**

27 mm impact socket with O ring and Pin



**E-24533**

32 mm impact socket with O ring and Pin



**E-24561**

36 mm impact socket with O ring and Pin



**E-24608**

42 mm impact socket with O ring and Pin



**E-24701**

32 mm deep impact socket with O ring and Pin



**E-24739**

36 mm deep impact socket with O ring and Pin



**E-24773**

46 mm deep impact socket with O ring and Pin



Check video



**XGT**

**TW009G**

40 V max - XGT Impact wrench 1"



Square drive



3.150 Nm



4.000 Nm



Auto-stop modes



Speed settings

- ▶ 1" anvil with friction ring and thru hole retention system for maximum productivity
- ▶ 3 forward and 3 reverse Auto-Stop modes for increased efficiency
- ▶ The handle can be rotated 360° (increments of 45°) and tilted back and forth in 9 steps

**TW009GT201** includes: rapid charger DC40RA, 2x 5,0 Ah battery BL4050F and plastic case

**TW009GZ** without batteries and charger

**XGT**

**TW010G**

40 V max - XGT Impact wrench 1"



Square drive



3.150 Nm



4.000 Nm



Auto-stop modes



Speed settings

- ▶ 1" long anvil with friction ring and thru hole retention system for maximum productivity
- ▶ 3 forward and 3 reverse Auto-Stop modes for increased efficiency
- ▶ The handle can be rotated 360° (increments of 45°) and tilted back and forth in 9 steps

**TW010GT201** includes: rapid charger DC40RA, 2x 5,0 Ah battery BL4050F and plastic case

**TW010GZ** without batteries and charger



Its robust performance makes it ideal for tackling heavy-duty tasks effortlessly, whether it's loosening stubborn nuts or tightening bolts with precision. This wrench ensures efficiency and reliability, promising to be a valuable tool in any demanding mechanical or industrial setting.



Check video



## Accessories for 3/4" impact wrenches



**E-22280**

27 mm impact socket with O ring and pin



**E-22305**

32 mm impact socket with O ring and pin



**E-22377**

30 mm deep impact socket with O ring and pin



**E-22399**

32 mm deep impact socket with O ring and pin



**134863-3**

36 mm deep impact socket with O ring and pin



**191667-2**

Extension handle

**XGT**

**TW001G**

**BL MOTOR XPT**

40 V max - XGT Impact wrench 3/4"



3/4"

Square drive



1.800 Nm

Fastening



2.050 Nm

Nut-busting



Auto-stop modes



4 Speed settings

- ▶ 3/4" anvil with friction ring and thru hole retention system for maximum productivity
- ▶ 3 forward and 3 reverse Auto-Stop modes for increased efficiency
- ▶ XPT™ is engineered to provide increased dust and water resistance in harsh job site conditions

**TW001GM201** includes: rapid charger DC40RA, 2x 4.0 Ah battery BL4040 and Makpac 3

**TW001GD201** includes: rapid charger DC40RA, 2x 2.5 Ah battery BL4025 and Makpac 3

**TW001GZ** without batteries and charger

**XGT**

**TW011G**

**BL MOTOR XPT**

40 V max - XGT Impact wrench 3/4"



3/4"

Square drive



1.800 Nm

Fastening



2.050 Nm

Nut-busting



Auto-stop modes




4 Speed settings

- ▶ 3/4" long anvil with friction ring and thru hole retention system for maximum productivity
- ▶ 3 forward and 3 reverse Auto-Stop modes for increased efficiency
- ▶ XPT™ is engineered to provide increased dust and water resistance in harsh job site conditions

**TW011GM201** includes: rapid charger DC40RA, 2x 4.0 Ah battery BL4040 and Makpac 3

**TW011GZ** without batteries and charger

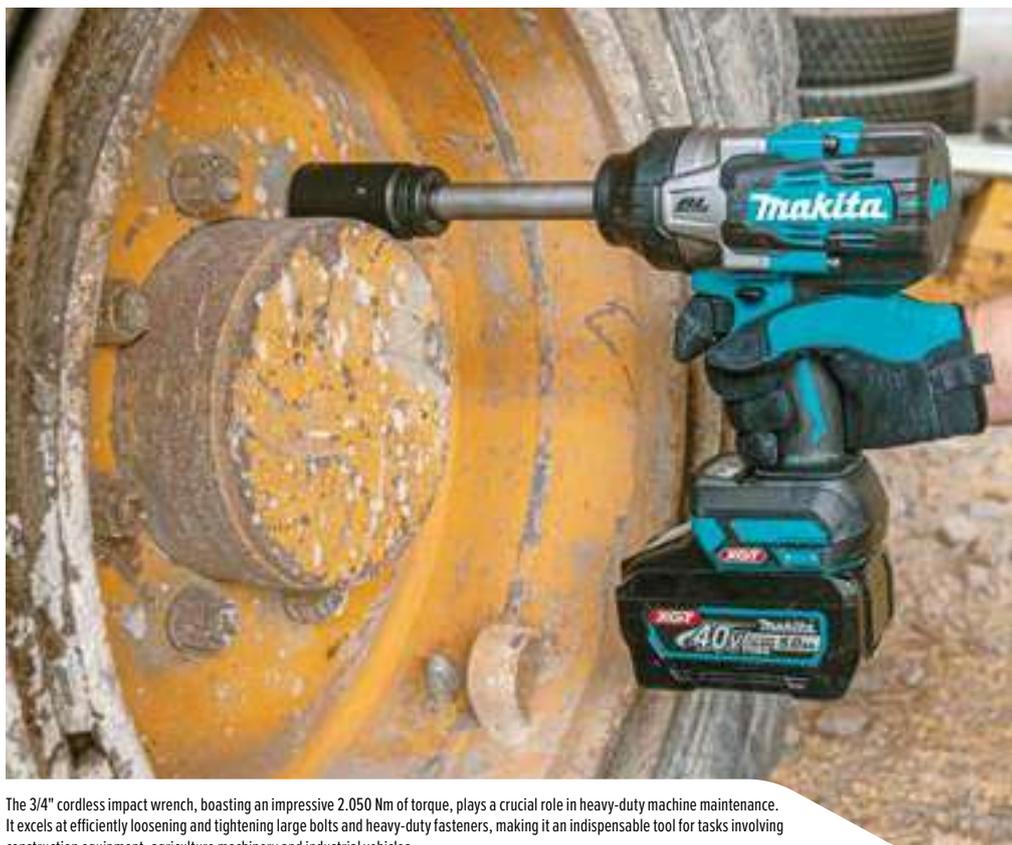

The 3/4" cordless impact wrench, boasting an impressive 2.050 Nm of torque, plays a crucial role in heavy-duty machine maintenance. It excels at efficiently loosening and tightening large bolts and heavy-duty fasteners, making it an indispensable tool for tasks involving construction equipment, agriculture machinery and industrial vehicles.

## Accessories for 1/2" impact wrenches



### E-16570

Impact black 1/2" impact sockets set with O ring and pin: 8, 10, 12, 13, 14, 16, 17, 19, 21 mm



### E-12354

1/2" impact deep sockets for wheel nut with O ring and pin: 17, 19 and 21



### E-16617

Impact black 1/2" impact sockets set with O ring and pin: 10, 11, 13, 17, 19, 21, 22, 24, 27 mm



### B-55706

1/2" impact socket extension bar: 250 mm



### B-68448

1/2" adapter for 1/4" Hex bits



### 191K57-9

Tool hanger



**XGT**

**TW007G**

40 V max - XGT impact wrench 1/2"



1/2"



760 Nm



1.100 Nm



Auto-stop modes



4 Speed settings

- ▶ Compact design with a short overall length of 170 mm
- ▶ 3 forward and 3 reverse Auto-Stop modes for increased efficiency
- ▶ XPT™ is engineered to provide increased dust and water resistance in harsh job site conditions

**TW007GM201** includes: rapid charger DC40RA, 2x 4.0 Ah battery BL4040 and Makpac 3

**TW007GD201** includes: rapid charger DC40RA, 2x 2.5 Ah battery BL4025 and Makpac 3

**TW007GZ** without batteries and charger



**XGT**

**TW005G**

40 V max - XGT impact wrench 1/2"



1/2"



350 Nm



630 Nm



Auto-stop modes



4 Speed settings

- ▶ Equipped with a 1/2" pin detent socket retention system for secure attachment
- ▶ 3 forward and 3 reverse Auto-Stop modes for increased efficiency
- ▶ Compact length at only 144 mm; ideal for working in tight spaces

**TW005GD201** includes: rapid charger DC40RA, 2x 2.5 Ah battery BL4025 and Makpac 2

**TW005GZ** without batteries and charger



The cordless 1/2" impact wrench is essential for heavy-duty machine maintenance, enabling fastening and loosening of bolts, nuts and other fasteners with ease. Its compact size and portability make it ideal for working in tight spaces on various machinery components.

## LXT range



**DTW1001**

18 V - LXT impact wrench

1.050 Nm, 3/4"



**DTW701**

18 V - LXT impact wrench

700 Nm, 1/2"



**DTW301**

18 V - LXT impact wrench

330 Nm, 1/2"



**LXT**

**DTL300**

18 V - LXT angle impact wrench 1/2"



1/2"

Square drive



360 Nm

Fastening



530 Nm

Nut-busting



Auto-stop modes



3

Speed settings

- ▶ 1/2" anvil with friction ring and thru hole retention system for maximum productivity
- ▶ 3 forward and 3 reverse Auto-Stop modes for increased efficiency
- ▶ Ideal for working in tight spaces and overhead applications

DTL300Z without batteries and charger

**LXT**

**DWR180**

18 V - LXT ratchet wrench 1/4" / 3/8"



3/8 / 1/4"

Square drive



47,5 Nm

Fastening



13 mm

Threaded rods



Manual ratchet option



1

Speed settings

- ▶ Interchangeable 3/8" and 1/4" anvils for added versatility
- ▶ Ideal for working in tight spaces and overhead applications
- ▶ Can be used as manual ratchet when motor is not engaged

DWR180Z without batteries and charger

## Accessories for 3/8" ratchet wrench



**B-39920**

10 mm impact socket



**B-39942**

12 mm impact socket



**B-39958**

13 mm impact socket



**B-39964**

14 mm impact socket



**B-39970**

15 mm impact socket



**B-39992**

17 mm impact socket



**B-40004**

18 mm impact socket



**B-40010**

19 mm impact socket



The cordless tools are designed for work in tight and hard-to-reach spaces, enabling fast and efficient fastening and loosening. Thanks to their compact design, they are ideal for servicing heavy-duty machinery, especially during maintenance tasks where access is limited but reliability and precision are essential

## Accessories for grease gun



**122D16-0**

410 g grease cartridge A



**1916S5-1**

Flexible hose with coupler - 1.200 mm



**1911M9-1**

Extension pipe for flexible hose



**191W60-2**

3 grease coupler set



**191A77-3**

Grease angle coupler



**1915E6-5**

Joint for connecting a 500 g grease cartridge to the tool

## Accessories for heat gun



**PR0000029**

Wide-slot nozzle



**PR0000030**

Reflector nozzle



**PR0000032**

Overlap welding nozzle



**PR0000034**

Welding nozzle



**XGT**

**GP001G**

**BL MOTOR XPT**

40 V max - XGT grease gun



350 ml/min

Flow rate



69 MPa

Pressure



455 g

Bulk grease capacity



1,2 m

Hose length



Air bleed valve

- ▶ Features four speed modes—145, 220, 290 and 350 ml/min—with a variable speed trigger for enhanced control
- ▶ Air bleed valve assists in faster pump priming
- ▶ Lock-on button for easier and more consistent grease delivery during extended operation

**GP001GZ** without batteries and charger

**XGT**

**HG001G**

40 V max - XGT heat gun



600 °C

Air temperature



+10 °C

Temperature adjustment



180 l/min

Air flow



Speed dial



Quick release

- ▶ Temperature adjustable from ambient to 600 °C in 10 °C increments
- ▶ Adjustable airflow settings: 70, 100, 140, 180 l/min
- ▶ LCD display shows temperature (°C/°F), airflow, battery level and error alerts – all with memory function

**HG001G** with plastic case and without batteries and charger



The cordless grease gun is essential for heavy-duty machine maintenance, enabling efficient lubrication of critical components for smooth operation and long service life. The cordless heat gun supports safe and precise heating for cable repairs and heat-shrink applications in confined engine compartments.

## LXT range



**DGP180**

18 V - LXT grease gun

290/145 ml/min, 69 MPa



**DHG181**

18 V - LXT heat gun

550/450/350/250/150°C, 200/120 l/min



**DHG180**

18 V - LXT heat gun

500°C, 200 l/min



Check video



### Accessories for inflator



**TE00000691**

Air pump adapter with 30° head angle



**TE00000796**

Air pump adapter with 0° head angle



### MP001G

40 V max - XGT high-pressure inflator



11,1 bar

Air pressure



Inflation modes



Air release button



65 cm

Hose length



LED job light

- ▶ Air release button allows pressure to be released if over inflation occurs
- ▶ Auto-stop function automatically stops inflation when preset air pressure is reached to prevent overflow
- ▶ Three speed settings (High/Medium/Low)

MP001G without batteries and charger



### DVP181

18 V - LXT vacuum pump



4 CFM

Vacuum class



3 Pa

Vacuum



113 l/min

Flow rate



Drain port



300 ml

Oil tank capacity

- ▶ Powerful dual-stage compression for efficient evacuation of large HVAC systems in heavy-duty equipment
- ▶ Built-in electromagnetic check valve prevents backflow, ensuring safe and reliable operation even during sudden shutdowns
- ▶ Ideal for purging air during maintenance of large-scale air conditioning and refrigeration units

DVP181ZK with plastic case and without batteries and charger

### Accessories for vacuum pumps



**AS0VP051MK**

Intake shut-off valve with gauge



**AS00XP808M**

Vacuum gauge



**AS0AI154MK**

Vacuum hose



**AS00VP050M**

Vacuum pump oil



**AS0Y06110K**

Adapter



The cordless high-pressure inflator is essential for heavy-duty machine maintenance, enabling fast and accurate inflation of tyres and pressure systems on site. The cordless vacuum pump supports reliable servicing of HVAC systems by efficiently removing air and moisture to ensure correct system operation and long-term performance

### LXT range



**DMP181**

18 V - LXT high-pressure inflator

11/7/2 bar



**DMP180**

18 V - LXT high-pressure inflator

8/7/2 bar



**DVP180**

18 V - LXT vacuum pump

20 Pa, 50 l/min

## Accessories for dust blower



**191X13-7**

ø 7 mm nozzle for cleaning filters



**191X15-3**

ø 13 mm nozzle for blowing



**191X19-5**

Wide angle nozzle



**191X78-9**

Nozzles for blowing in narrow space



**191X21-8**

Flexible hose nozzle



**191X29-2**

Filter assembly

## Accessories for blower



**123241-2**

Dust bag



Check video



**XGT**

**AS001G**

**BL**  
MOTOR

40 V max - XGT blower



**200 m/s**  
Air velocity



**1,1 m³/min**  
Air volume



**2,8 N**  
Blowing force



**4**  
Variable speed



**✓**  
Quick release

- ▶ 4 digitally controlled speeds for a wide range of applications
- ▶ 5 nozzles included for a wide range of applications
- ▶ Filter on blower intake reduces dust being blown through the blower

**AS001GZ** without batteries and charger



Check video



**XGT**

**UB002G**

**BL**  
MOTOR

40 V max - XGT blower / vacuum



**99 m/s**  
Air velocity



**3,6 m³/min**  
Air volume



**3,1 N**  
Blowing force



**x3**  
No. of speeds



**5,4 kPa**  
Suction

- ▶ Switch with variable speed control and 3-stage speed control
- ▶ With long garden nozzle and short standard nozzle
- ▶ Convenient vacuum function by moving the nozzle to the suction inlet and attaching an optional dust bag (123241-2)

**UB002GZ01** without batteries and charger



Use a cordless dust blower to clean air filters and remove debris from engine compartments, cooling systems, electrical panels and hard-to-reach areas on heavy-duty machinery.

## LXT range



**DAS180**

18 V - LXT dust blower

200 m/s, 2,8 N



**UB001G**

40 V max - XGT blower

64 m/s, 17 N



**DUB184**

18 V - LXT blower

52,1 m/s, 10,9 N



Check video



Check video



JR002G

40 V max - XGT recipro saw



32 mm

Stroke length



255 mm

Cutting in wood



130 mm

Cutting in steel



Cutting functions



Speed dial

- ▶ Delivers the power of a 1.800 W corded reciprocating saw
- ▶ On/Off orbital feature provides more aggressive cuts
- ▶ Refined crank mechanism design minimizes blade deflection and reduces vibration

JR002GM201 includes: rapid charger DC40RA, 2x 4,0 Ah battery BL4040 and plastic case

JR002GZ without batteries and charger



HM001G

40 V max - XGT demolition hammer



SDS-Max

Shank type



9,4J

Impact energy



12

Angle bit setting



Speed dial



Constant speed

- ▶ Adapted for SDS-MAX bits
- ▶ Constant speed control automatically applies additional power under load for optimum performance
- ▶ Dust extraction capability with optional Makita Dust Attachment Kit

HM001GM201 includes: rapid charger DC40RA, 2x 4,0 Ah battery BL4040 and plastic case

HM001GZ02 without batteries and charger

## Accessories for recipro saw



B-55594

305 mm reciprosaw blade with tungsten carbide tip for metal, mild steel, cast iron and stainless steel



B-63585

305 mm reciprosaw blade with tungsten carbide tip for aerated concrete and epoxy



B-10403

455 mm reciprosaw blade with tungsten carbide tip for aerated concrete

## Accessories for demolition hammer



B-64272

25 x 400 mm premium chisel for SDS-MAX hammers



B-64266

400 mm premium bull-point for SDS-MAX hammers



P-16302

50 x 360 mm scaling chisel for SDS-MAX hammers



Cordless reciprocating saw for cutting metal, plastic and wood in heavy-duty maintenance and demolition tasks



Versatile cordless demolition hammer for heavy-duty maintenance, like cleaning grousers, blades and buckets.

## LXT range



DJR360

18 + 18 V - LXT recipro saw

32 mm, 255/130 mm



DHK180

18 V - LXT demolition hammer

3,1 J, SDS-Plus

## Accessories for angle grinders



### B-55326

230 mm diamond wheel for multi material: steel, stainless steel, nonferrous metal, PVC, concrete, glass



### E-13764

230 mm thin cut off wheel for stainless steel, metal and mild steel



### B-55310

125 mm diamond wheel for multi material: steel, stainless steel, nonferrous metal, PVC, concrete, glass



### E-03040

125 mm thin cut off wheel for stainless steel, metal and mild steel



### B-29022

125 mm fiberglass strip disc for cleaning without removing any material or weakening the workpiece.



### B-53936

125 mm fiberglass flap disc for material removal and surface preparation



Check video



**GA038G**

*BL AFT AWS XPT*

40 V max - XGT angle grinder 230 mm

 **230 mm**  
Wheel diameter

 **1.700 W**  
Output power

 **6.600 RPM**  
No load speed

 **Soft start**

 **Electric brake**

- ▶ Automatic-start Wireless System (AWS®) for wireless power-on/off communication between tool and dust extractor (AWS® Transmitter sold separately)
- ▶ Anti-restart protection engineered to prevent motor start up when battery is inserted with switch locked on
- ▶ Paddle switch with no lock-on for operator convenience

**GA038GT01** includes: rapid charger DC40RA, 2x 5,0 Ah battery BL4050F and plastic case

**GA038GZ** without batteries and charger



**GA005G**

*BL AFT XPT*

40 V max - XGT angle grinder 125 mm

 **125 mm**  
Wheel diameter

 **1.100 W**  
Output power

 **8.500 RPM**  
No load speed


 **Soft start**

 **Electric brake**

- ▶ Active Feedback-sensing Technology (AFT®) turns the motor off if rotation of the wheel is suddenly forced to stop
- ▶ Anti-restart protection engineered to prevent motor start up when battery is inserted with switch locked on
- ▶ Slide switch with lock-on for operator convenience

**GA005GM201** includes: rapid charger DC40RA, 2x 4,0 Ah battery BL4040 and Makpac 4

**GA005GZ** without batteries and charger

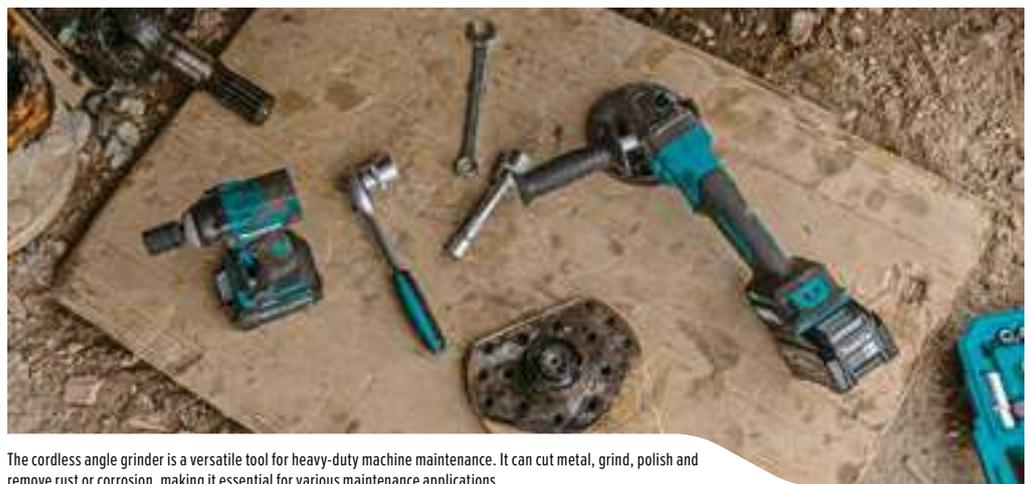

The cordless angle grinder is a versatile tool for heavy-duty machine maintenance. It can cut metal, grind, polish and remove rust or corrosion, making it essential for various maintenance applications.

## LXT range



**DGA900**  
18 + 18 V - LXT angle grinder  
230 mm, 6.600 min<sup>-1</sup>



**DGA504**  
18 V - LXT angle grinder  
125 mm, 8.500 min<sup>-1</sup>



**DMC300**  
18 V - LXT compact cut-off  
76 mm, 20.000 min<sup>-1</sup>



Check video



## Accessories for die grinder



**B-52722**

Ø 10 x 20 mm, diamond-cut bit for removing burrs on metal and stainless steel



**B-52750**

Ø 10 x 20 mm, diamond-cut bit for removing burrs on metal, stainless steel and aluminum



**B-52788**

Ø 10 x 20 mm, diamond-cut bit for removing burrs on aluminum.



**B-52819**

Ø 10 x 25 mm, diamond-cut bit for cleaning weld seams between steel plates, suitable for metal and stainless steel



**B-36918**

Ø 50,8 x 38,1 mm – 40 grit flap wheel,



**B-36974**

Ø 50,8 x 50,8 mm – 60 grit flap wheel

## Accessories for belt sander



**Sanding belt 9 x 533 mm**

- P-43256 – 40 grit
- P-43262 – 60 grit
- P-43278 – 80 grit
- P-43284 – 100 grit
- P-43290 – 120 grit

**XGT**

**GD001G**

40 V max - XGT die grinder



Ø 6 mm

Collet size



29.000 RPM

No load speed



Speed dial



Electric brake



LED job light

- ▶ Compact barrel grip design and low weight for easy handling
- ▶ Vent slots designed to direct exhaust air away from the user
- ▶ Stepped neck for working in tight spaces
- ▶ Slide switch with lock-on and speed dial for operator convenience

**GD001GZ** without batteries and charger

**LXT**

**DBS180**

18 V - LXT belt sander



533 mm

Belt length



9 mm

Belt width



135°

Arm pivot



1.700 m/min

Belt speed



Speed dial

- ▶ L.E.D. light adjusts to match the angle of the sanding arm or the shape of the workspace
- ▶ Versatile for both wood and metal applications
- ▶ Variable speed control dial (600 – 1.700 m/min) to match speed to the application
- ▶ Two optional arm assemblies (6 mm and 13 mm) available for increased versatility

**DBS180Z** without batteries and charger



A die grinder is vital in machinery maintenance, used to smooth welds, remove rust, and prep surfaces. Its compact, high-speed design is ideal for tight spaces and detailed work.

**LXT range**



**DGD800**

18 V - LXT die grinder

6 mm, 26.000 min<sup>-1</sup>



Perfect for servicing heavy duty equipment, the 9 mm belt sander delivers powerful material removal in hard-to-reach areas. Ideal for cleaning welds, removing rust, and prepping narrow surfaces.

## Accessories for driver drill and impact driver



### D-30564

170-piece HSS-TiN coated drill bit set for metal,  $\varnothing$  1–10 mm



### E-07032

27-piece drilling and fastening set: includes HSS-TiN metal bits, masonry bits and wood bits — all  $\varnothing$  3–10 mm. Also includes 25 mm screwdriver bits (PH, SL, PZ, H, T) with 60 mm bit holder



### Torsion screw bit

Impact premier – PH (1/2/3), PZ (1/2/3), T (10/15/20/25/30/40)



### Double ended torsion screw bit

Impact premier – PH2, PZ2



### Tilt socket adapter

Impact premier – 1/2" and 3/8" drive



### Torsion bit holder

Impact premier – 68/150 mm



### Ultra mag torsion bit holder

Impact premier – 79 mm



### Torsion nutsetter

Impact premier – 6/8/10/13 mm



### Tilt socket bit

Impact premier – 13/15/17/19/21 mm



Check video



DF002G

40 V max - XGT driver drill



$\varnothing$  38 mm

Capacity wood



$\varnothing$  13 mm

Capacity metal



64/30 Nm

Fastening torque



1 - 5 Nm

Clutch setting



1,5 - 13 mm

Chuck capacity

- ▶ Metal gear design and reinforced housing for maximum durability on the job site
- ▶ Compact and ergonomic design at only 164 mm
- ▶ 2 speed settings 0 - 550/2,200 min<sup>-1</sup>

DF002GD201 includes: rapid charger DC40RA, 2x 2,5 Ah battery BL4025 and Makpac 2

DF002GZ without batteries and charger



TD004G

40 V max - XGT impact driver



230 Nm

Fastening torque



4

No. of speeds



T<sup>1</sup>

T-mode (thin metal)



Quick bit installation



LED job light

- ▶ 4-stage impact power and T-Mode (for thin metal) to minimize screw stripping when a self-drilling screw is tightened into a thin metal sheet workpiece under light load.
- ▶ Compact length at only 136 mm ideal for working in tight spaces
- ▶ Equipped with an electric brake and anti-restart function for safe operation

TD004GD201 includes: rapid charger DC40RA, 2x 2,5 Ah battery BL4025 and Makpac 2

TD004GZ without batteries and charger



Driver drills combine speed, power, and versatility to handle a wide range of service and repair tasks efficiently. From removing or securing fasteners during inspection, repair or part replacement to drilling into metal and composite parts.

## LXT range



### DDF492

18 V - LXT driver drill  
50 mm, 13 mm, 140 Nm



### DTD173

18 V - LXT impact driver  
1/4", 180 Nm



### DTL061


18 V - LXT angle impact driver  
1/4", 60 Nm



**LXT**

**DRV250**

18 V - LXT rivet gun



- ▶ Installs rivets from 2,4 to 6,4 mm
- ▶ 30 mm stroke sets most rivets in one stroke
- ▶ Tool holds rivet in place, allowing operation in any orientation
- ▶ Suitable for aluminium, steel, and stainless steel rivets
- ▶ Transparent mandrel catch container for easy viewing of fill level

**DRV250Z** without batteries and charger


**BL XPT**



**LXT**

**DCG180**

18 V - LXT caulking gun



- ▶ 5 speed dial optimizes flow rate from 0 - 28 mm/sec.
- ▶ Drip-reduction feature automatically relieves pressure on the material when trigger is released to prevent unintentional dispensing
- ▶ Overload indicator light notifies the operator when tool is nearly overloaded to minimize breakage of the sealant cartridge

**DCG180Z** with 300 ml holder, without batteries and charger

**DCG180ZB** with 600 ml cartridge, without batteries and charger



Ideal for securing panels, fenders, and guards on heavy-duty machinery. Rivets offer a strong, reliable bond that resists vibration and harsh conditions.

**LXT range**



**DRV150**

18 V - LXT rivet gun

4,8 mm, 10.000 N, 25 mm




A caulking gun applies sealants and adhesives cleanly and efficiently, sealing panels, windows, and enclosures against water and dirt while also cushioning components to reduce vibration and noise.

**Accessories for rivet gun**



**199730-9**

Jaws – 6,4 mm

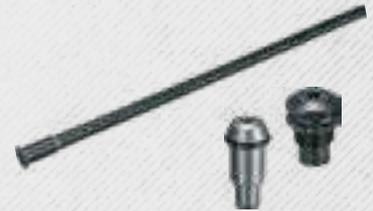

**Nose piece, jaw pusher and pipe set**

191F80-4 – 4,0 mm

191F79-9 – 4,8 mm

199725-2 – 6,0 mm

191F78-1 – 6,4 mm



**191D57-7**

Molybdenum Disulfide Grease – 5 g

**Accessories for caulking gun**



**196351-8**

300 ml cartridge holder



**191P89-6**

400 ml cartridge style, sausage style and bulk caulks and adhesives



**1911T4-0**

600 ml cartridge style, sausage style and bulk caulks and adhesives

## Accessories for random orbit sander and orbital sander



### Net type abrasive disc ø 150 mm

Exceptional dust extraction and consistent finish — ideal for high-performance sanding. \*Use with a pad saver for maximum durability:

- D-78710 – 80 grit (10/1)
- D-78726 – 120 grit (10/1)
- D-78732 – 180 grit (10/1)
- D-78748 – 240 grit (10/1)
- D-78754 – 320 grit (10/1)



### Net type abrasive delta paper 100 x 150 mm

Exceptional dust extraction and consistent finish — ideal for high-performance sanding. \*Use with a pad saver for maximum durability:

- D-78900 – 120 grit (10/1)
- D-78916 – 180 grit (10/1)
- D-78922 – 240 grit (10/1)
- D-78938 – 320 grit (10/1)



### D-78760

Pad saver ø 150 mm (2/1)



### D-78944

Delta pad saver 100 x 150 mm (2/1)



### 1914H8-6

Comfortable backpack for carrying the battery with effortless mobility



Check video



Check video



### B0002CG



40 V max - XGT random orbit sander



ø 150 mm

Abrasive disc



5 mm

Orbit diameter



Hook & loop



1,6 m

Connector cord



Speed dial

- ▶ 5-speed variable speed control dial lets the operator match pad speed from 6,000 to 10,000 min<sup>-1</sup> to the application for smooth, refined finish sanding
- ▶ Ultra low profile design with superior ergonomics and up to 41% less vibration
- ▶ Smooth soft start with constant speed control is capable of handling demanding sanding applications

B0002CGZ without batteries and charger



### B0006CG



40 V max - XGT orbital sander



100x150 mm

Abrasive disc



3 mm

Orbit diameter



Hook & loop



1,6 m

Connector cord



Speed dial

- ▶ 5-speed variable speed control dial lets the operator match pad speed from 6,000 to 10,000 min<sup>-1</sup> to the application for smooth, refined finish sanding
- ▶ Ultra low profile design with superior ergonomics and up to 41% less vibration
- ▶ Smooth soft start with constant speed control is capable of handling demanding sanding applications

B0006CGZ without batteries and charger



Built for demanding industrial maintenance, these sanders combine robust performance with refined control. Whether smoothing weld seams or prepping metal surfaces, their low-vibration design, variable speed, and ergonomic form ensure precision, comfort and reliability — even in the toughest environments.



Check video



**XGT**

**CL001G**

40 V max - XGT cleaner



**21 kPa**  
Sealed suction



**125 W**  
Suction power



**730 ml**  
Dust capacity



Speed dial



**54 dB**  
Low noise

- ▶ Capsule type cleaner for quick debris disposal
- ▶ 4-speed options for power and run time management
- ▶ L.E.D. light for improved visibility and also functions as low battery charge indicator
- ▶ Compact and ergonomic design for operator comfort

**CL001GZ** without batteries and charger



Compact, portable vacuum cleaners are ideal for maintaining your equipment clean for reliable and safer operation.

### LXT range



**DCL184**

18 V - LXT cleaner

5,4 kPa, 38 W, 500/330 ml



Check video



**XGT**

**VC013GL / VC014GL**

40 V max - XGT portable vacuum cleaner



**15 kPa**  
Sealed suction



**165 W**  
Suction power



**7,5/4,5 l**  
Dry / wet capacity



HEPA filter



Variable suction power

- ▶ Filter cleaning system is designed to maintain optimum suction power and longer filter life
- ▶ On-board hose and nozzle storage allow for easy and convenient transport
- ▶ Two tools in one; quickly converts from vacuum to blower for increased versatility

**VC013GLZ01** with AWS system, without batteries and chargers

**VC014GLZ** without AWS system, batteries and charger



### Accessories for cleaner



**199966-0**

Easy shake off filter



**199989-8**

HEPA filter

### Accessories for portable vacuum cleaner



**199827-4**

Pre filter set for dry vacuuming



**1915T4-4**

Filter set for wet vacuuming



**195432-5**

High quality poly dust bag – 45 l (10/1)



**1915T3-6**

Filter dust bag (10/1)



**1915W5-3**

Paper dust bag (10/1)



**1915G5-1**

4 caster wheels



**199486-4**

Shoulder belt

## Accessories for polisher/scrubber



**1914T0-6**

Soft brush for cleaning wooden floors



**1914T1-4**

Medium brush for cleaning general interior floors



**1914T2-2**

Hard brush for cleaning concrete floors and grease stains



**1914T3-0**

Hard abrasive brush for cleaning tiled floors



**1914S4-1**

Pad holder - hook and loop



**1914S5-9**

Fine floor pad for wax polishing



**1914S6-7**

Smooth floor pad for wax polishing



**1914S7-5**

Medium floor pad for wax cleaning



**1914S8-3**

Rough floor pad for wax removal



**1914S9-1**

Coarse floor pad for wax removal



Check video



**XGT**

**PS001G**

**BL MOTOR XPT**

40 V max - XGT polisher/scrubber



ø 200 mm

Floor pad



ø 190 mm

Brush pad



354 mm

Telescoping handle



Speed dial



Quick pad change

- ▶ 3-speed selection (150/350/650 min<sup>-1</sup>) allows the user to adjust the speed to the application for polishing, cleaning and wax removal
- ▶ Adjustable head with selectable fixed or free-moving operation
- ▶ Removable splash guard prevents water or cleaning agent from splashing during use
- ▶ Easy installation or removal of the brush or floor pad without direct contact

**PS001GZ** without batteries and charger



The polisher/scrubber is built for heavy-duty maintenance, ideal for cleaning large machines and surrounding floor surfaces. Its rugged design ensures reliable performance in demanding industrial settings.



Check video



**XGT**

**VS001G**

**BL MOTOR HEPA filter XPT**

40 V max - XGT vacuum sweeper



650 mm

Sweeping width



20 mm

Brush height adjustment



24 l

Debris container



HEPA filter



Quiet mode

- ▶ 3-brush design engineered for cleaning a variety of dust and waste materials
- ▶ Dual suction modes, Standard Mode for cleaning large amounts of dust and waste, and Quiet mode ideal for cleaning indoors and in smaller areas
- ▶ Side brush height adjustment dial with on/off lever
- ▶ Automatic self-cleaning filtration system maintaining optimal suction and longer filter life

**VS001GZ** without batteries and charger



Cordless vacuum sweeper ensures reliable performance even in demanding environments, combining HEPA filtration, two main brushes and a side brush, plus compact storage for effortless thorough cleaning.



Check video



**XGT**

**HW001G**

**BL MOTOR XPT**

40 V max - XGT high-pressure washer



8,5 MPa  
Pressure



5,5 l/min  
Water flow



5 m  
Hose length



1 m  
Suction height



Self priming function

- ▶ Adjustable pressure function with three modes
- ▶ Option to supply water from a tap or by pumping from a reservoir
- ▶ Two battery connections, with automatic switching to the second battery for longer operation
- ▶ Compact trolley design for easy portability and transport.

**HW001GZ** without batteries and charger

## Accessories for high-pressure washer



**197842-2**  
Trigger gun



**197831-7**  
Rotary brush



**1912Y4-1**  
Variospray nozzle



**197828-6**  
Wash brush



**122F21-9**  
Variospray nozzle with extension



**1912Y2-5**  
Foam nozzle with container



**1912Y6-7**  
Variospray lance



**126766-5** (5 m)  
High pressure hose



**197824-4**  
Cyclone jet nozzle



**197845-6** (5 m)

**197847-2** (8 m)

**197850-3** (10 m)

High pressure hose extension



**197864-2**  
Brush for upgrade cyclone jet nozzle



**197837-5** (10 m)

**197840-6** (15 m)  
Drain & gutter hose



**197870-7**  
Extension pipe (0,9 m/1,3 m/1,7 m)



**197867-6**  
Anti twist adapter

● Supplied ○ Optional



**1910R2-4**  
Hose with filter for the water supply from the tank  
(use with hose 1910R1-6)



**1910R1-6**  
Hose with quick couplings and non-return valve – 3 m



**197873-1**  
Hose with filter for the water supply from the tank



**197881-2**  
Absorption connector with filter



**197883-8**  
Quick-coupling (non-return valve)



**127104-4**  
Water tank 50 l



The high-pressure washer is perfect for heavy-duty machinery, delivering robust cleaning performance with the flexibility to supply water from a faucet or a separate water reservoir.

# MAKTRAK™



## THE NEXT GENERATION IN MODULAR STORAGE SYSTEMS

*Introducing the next generation in modular storage systems - Makita MAKTRAK. The smart storage solution of tool boxes and organisers with stackable design, easier access and improved loading/unloading into a truck bed or van.*

MAKTRAK tool boxes keep your tools secure and easily accessible. Their dual hinged lids allow access from both sides, without unstacking the boxes, while the innovativet horizontal design means they will accomodate larger tools like nailers, saws and rotary hammers.

MAKTRAK organisers are built to keep your workspace efficient and within reach. You can choose from deep medium, low profile medium and deep compact organisers, each designed with maximum durability and storage efficiency in mind.

### Transport



Premium handle with Gecko Grips™ provides efficient truck/van loading and unloading.

### Access



Horizontal dual-hinged lid allows access to any case without unstacking or interference from the handle.

### Store



Horizontal design provides wider interior space for larger tools and accessories.

### Organise



Customisable with lid mounting points, panel dividers, bins and battery/ charger storage trays.

# BUILD YOUR OWN

## MIX AND MATCH STACK AND STORE

Trak connection works in both directions, providing a strong and secure link while offering a quick disconnection via a lever.



### P-91001

#### Transport tool box - 81,9 l

- ▶ Spacious and robust design with dimensions of 1.011 × 565 × 295 mm
- ▶ Max load capacity of 113 kg suitable for heavy-duty tools and equipment
- ▶ Dual hinged lid allows convenient access from both sides
- ▶ Secure latch locking system with padlock compatibility for added protection
- ▶ Removable storage tray keeps small parts and tools organised
- ▶ Durable handle extends up to 387 mm for easy transport
- ▶ Heavy-duty construction with a weight of 17,44 kg for long-lasting use



### P-91017

#### Large tool box - 63 l

- ▶ Compact and sturdy design with dimensions of 802 × 565 × 252 mm
- ▶ Max load capacity of 45 kg suitable for medium-duty storage needs
- ▶ Dual hinged lid offers easy access from either side
- ▶ Secure latch locking system with option for padlock use
- ▶ Large removable storage tray for organising tools and accessories
- ▶ Built to last with a durable 10,11 kg construction



### P-91023

#### Deep extension box - 58,4 l

- ▶ Compact vertical design with dimensions of 394 × 565 × 402 mm
- ▶ Max load capacity of 45 kg suitable for various storage applications
- ▶ Dual hinged lid provides convenient top access
- ▶ Secure latch locking system with padlock compatibility for added safety
- ▶ Lightweight yet durable with a total weight of 7,21 kg



### P-91039

#### Medium tool box - 18,4 l

- ▶ Low-profile and compact design with dimensions of 387 × 562 × 161 mm
- ▶ Max load capacity of 34 kg ideal for smaller tools and components
- ▶ Secure latch locking system with padlock compatibility for extra protection
- ▶ Durable and lightweight build with a total weight of 4,45 kg



### P-91045

#### Deep medium organiser - 18,4 l

- ▶ Compact design with dimensions of 387 × 562 × 163 mm
- ▶ Max load capacity of 22,6 kg suitable for light to medium-duty storage
- ▶ Clear lid for easy overview with ribbed design that secures bins in place
- ▶ Secure latch locking system with padlock compatibility
- ▶ Durable construction with a total weight of 4,87 kg



### P-91051

#### Low medium organiser - 8,4 l

- ▶ Slim and space-saving design with dimensions of 387 × 596 × 85 mm
- ▶ Clear lid for easy overview with ribbed design that secures bins in place
- ▶ Secure latch locking system with padlock compatibility
- ▶ Lightweight build at just 2,89 kg



### P-91067

#### Deep compact organiser - 8,55 l

- ▶ Ultra-compact format with dimensions of 278 × 389 × 162 mm
- ▶ Clear lid for easy overview with ribbed design that secures bins in place
- ▶ Secure latch locking system with padlock compatibility
- ▶ Easy to carry with a weight of only 2,59 kg

## Interlocking cases and transportation



**821549-5**  
MAKPAC 1 interlock case  
395 x 295 x 105 mm



**821550-0**  
MAKPAC 2 interlock case  
395 x 295 x 155 mm



**821551-8**  
MAKPAC 3 interlock case  
395 x 295 x 215 mm



**821552-6**  
MAKPAC 4 interlock case  
395 x 295 x 315 mm




**TR0000001**  
MAKPAC trolley



**XGT**  
**ML007G**

40 V max - XGT L.E.D. flashlight / spotlight



► 4-mode operation: delivering 600 lumens on Spot, 1.000 lumens on Flood, 1.200 lumens on Spot/Flood and Strobe mode

**ML007G** without batteries and charger




Check video



**LXT**  
**DML814**

18 V - LXT L.E.D. worklight



► 4-mode operation: delivering 600 lumens on Spot, 1.000 lumens on Flood, 1.250 lumens on Spot/Flood and Strobe mode

**DML814** without batteries and charger



**XGT**  
**ML012G**

40 V max - XGT L.E.D. bar light



► The LED light bar section folds in half for double-sided illumination and compact storage or transport

**ML012G** without batteries and charger




Check video



**LXT**  
**DML818**

18 V - LXT L.E.D. bar light

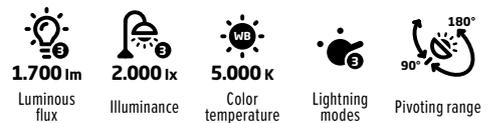

► The LED light bar section folds in half for double-sided illumination and compact storage or transport

**DML818** without batteries and charger



Check video

**XGT****XGT****191J81-6****2,5 Ah****40 V max - XGT power set**

- ▶ 2x XGT® 2,5 Ah batteries BL4025
- ▶ XGT® rapid charger DC40RA with dual-fan design circulates air through the battery to cool the battery and circuit board quickly for faster charging
- ▶ Charges a 40 V max - XGT® 2,5 Ah battery in 28 minutes
- ▶ MAKPAC 1 interlock case

**XGT****XGT****191U13-9****5,0 Ah****40 V max - XGT power set**

- ▶ 2x XGT® 5,0 Ah batteries BL4050F
- ▶ XGT® dual port rapid charger DC40RB with three fan design circulates air through the battery to cool the battery and circuit board quickly for faster charging
- ▶ Charges a two 40 V max - XGT® 5,0 Ah battery in 50 minutes
- ▶ MAKPAC 3 interlock case

**LXT****LXT****191U13-9****6,0 Ah****40 V max - XGT power set**

- ▶ 2x LXT® 6,0 Ah batteries BL1860B
- ▶ LXT® dual port rapid charger DC18RD with two fan design circulates air through the battery to cool the battery and circuit board quickly for faster charging
- ▶ Charges a two 18 V - LXT® 6,0 Ah battery in 55 minutes
- ▶ MAKPAC 3 interlock case

**ADP10 (191C10-7)****18 V LXT® adapter for XGT® chargers**

- ▶ Adapts 40 V max XGT® chargers to charge 18V LXT® batteries
- ▶ Charges an 18 V LXT® 6,0 Ah battery in only 40 minutes

## CHARGE XGT® & LXT® BATTERIES

Use adapter ADP10 with XGT chargers to rapid charge the 18 V LXT® batteries

**XGT**

GOING BEYOND  
**LIMITS**

**40 V | 80 V max**



MAKITA  
Jan-Baptist Vinkstraat 2  
B-3070 Kortenberg



# POWER & PRECISION FOR HEAVY-DUTY MAINTENANCE

40Vmax - XGT®

TW010G **LONG ANVIL IMPACT DRIVER**

GP001G **GREASE GUN**