



CONCRETE AND METAL STRUCTURE **CONSTRUCTION**



LAYING THE
FOUNDATION



CONCRETE
MODIFICATION



STRUCTURE
WALL
ROOF
WINDOW



METAL
ALUMINIUM
SANDWICH
PANELS
BRICKS
PIPES

REBAR AND MESH



Rebar tying
tools

6



Steel rod
cutters

8

FRAMEWORK



Rotary
laser

10



Circular
saws

10

CUTTING AND GRINDING CONCRETE



Power
cutters

12



Angle
grinders

13

DRILLING IN CONCRETE



Rotary
hammers

16



Combination
hammers

16

FIXING AND DRILLING



Impact
wrenches

20



Impact
drivers

21

METALWORKING



Hole
puncher

23



Flat-head angle
grinder

23

CUTTING METAL



Metal
cutter

24



Nibbler

24

CUTTING METAL AND BRICK



Recipro
saws

28



Jig saw

28

FOUNDATION



Angle grinder 8



Concrete vibrator 9



Screed 9



Mixer 9



Table top miter saw 11



Chain saw 11



Impact driver 11



Nailers 11

DEMOLITION



Demolition hammers 14

DUST EXTRACTION



Vacuum cleaners 15

DRILLING AND CHANNELING



Dust blower 17



Diamond core wet drills 19



Wall chasers 19



Angle impact wrench 22



Rivet gun 22



Driver drills 22



Die grinder 23



Magnetic drills 27

CUTTING PANELS



Metal shear 24



Band saws 24



Circular saws 25

STAPLING



Stapler 28

CUTTING ALUMINIUM



Miter saws 29

SEALING



Caulking gun 29

OTHER WORK



Vacuum sweeper 30



Multi function power head 30



Earth auger 30



Blowers 31



Transport trolleys 32



Grease gun 32



Maktrak tool cases 33



Accessories 34

MODEL COMPARISON



Comparison Rotary hammers 18


Comparison Vacuum cleaners 18

Comparison Impact wrenches 23

Comparison Impact drivers 23


Comparison Angle grinders 25

40 V MAX XGT® BATTERIES AND CHARGERS

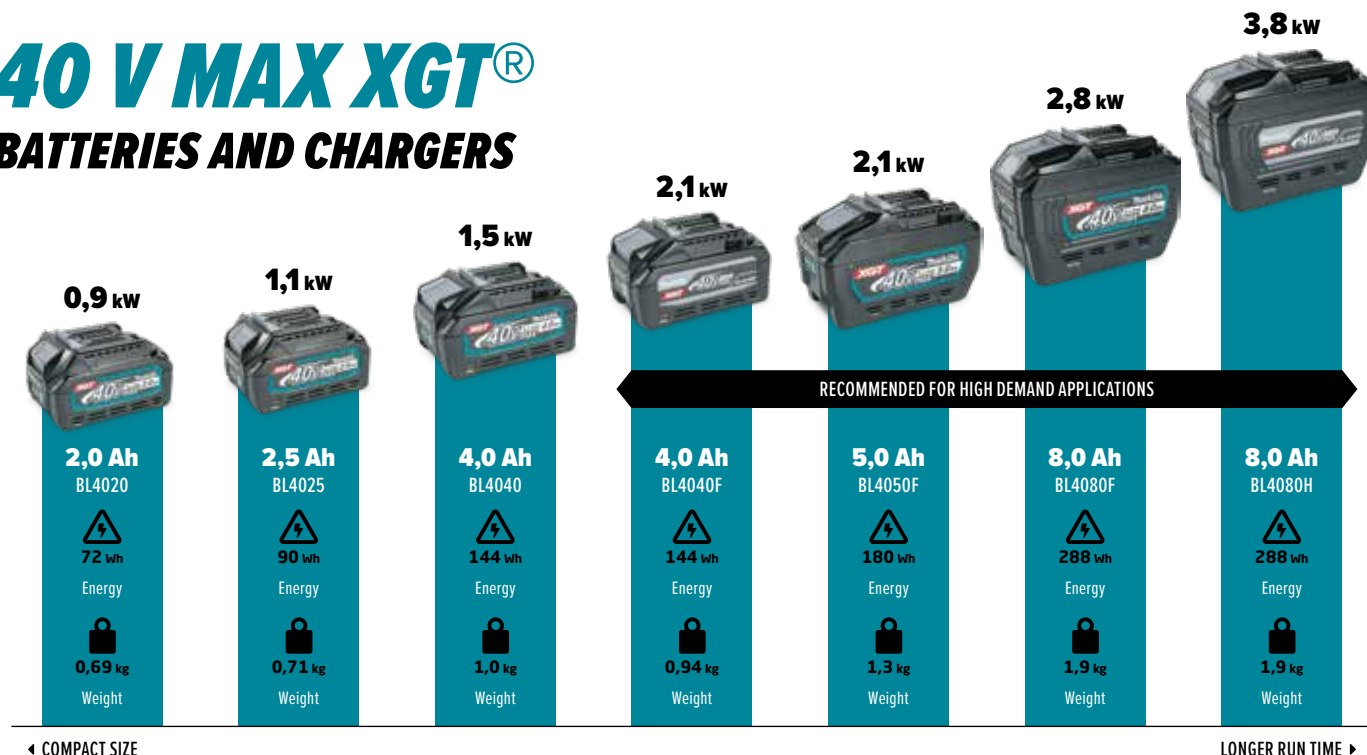

DC40RA

40 V max XGT® Rapid charger

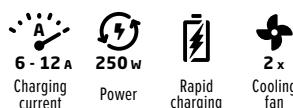


Charging times for one battery

BL4020 / 2,0 Ah	22 min
BL4025 / 2,5 Ah	28 min
BL4040 or BL4040F / 4,0 Ah	45 min
BL4050F / 5,0 Ah	50 min
BL4080F or BL4080H / 8,0 Ah	76 min



DC40RB

40 V max XGT® Dual rapid charger

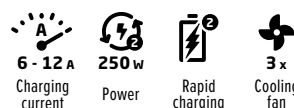


Charging times for two batteries

BL4020 / 2,0 Ah	22 min
BL4025 / 2,5 Ah	28 min
BL4040 or BL4040F / 4,0 Ah	45 min
BL4050F / 5,0 Ah	50 min
BL4080F or BL4080H / 8,0 Ah	76 min



DC40RC

40 V max XGT® Charger

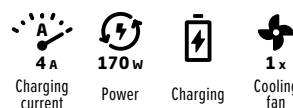


Charging times for one battery

BL4020 / 2,0 Ah	30 min
BL4025 / 2,5 Ah	38 min
BL4040 or BL4040F / 4,0 Ah	67 min
BL4050F / 5,0 Ah	85 min
BL4080F or BL4080H / 8,0 Ah	170 min



DC40WA

40 V max XGT® Dual charger



Charging times for two batteries

BL4020 / 2,0 Ah	110 min
BL4025 / 2,5 Ah	130 min
BL4040 or BL4040F / 4,0 Ah	210 min
BL4050F / 5,0 Ah	260 min
BL4080F or BL4080H / 8,0 Ah	420 min




ADP10 Adapter: enables the charging of LXT batteries



1914U0-3

BCC02 - Battery charging station

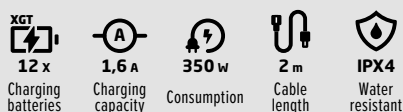


Allows charging of up to 12x XGT batteries
4 batteries charge simultaneously; once one battery is fully charged, the next in sequence starts automatically
Batteries BL4050F, BL4080F and BL4080H are not compatible with BCC02 charging station




1914U3-7

BCC01 - Battery charging station

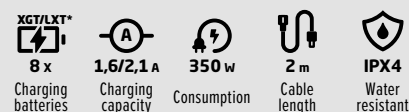

Allows charging of up to 8x XGT batteries or *LXT batteries using the ADP10 adapter
4 batteries charge simultaneously; once one battery is fully charged, the next in sequence starts automatically


18 V LXT® BATTERIES AND CHARGERS

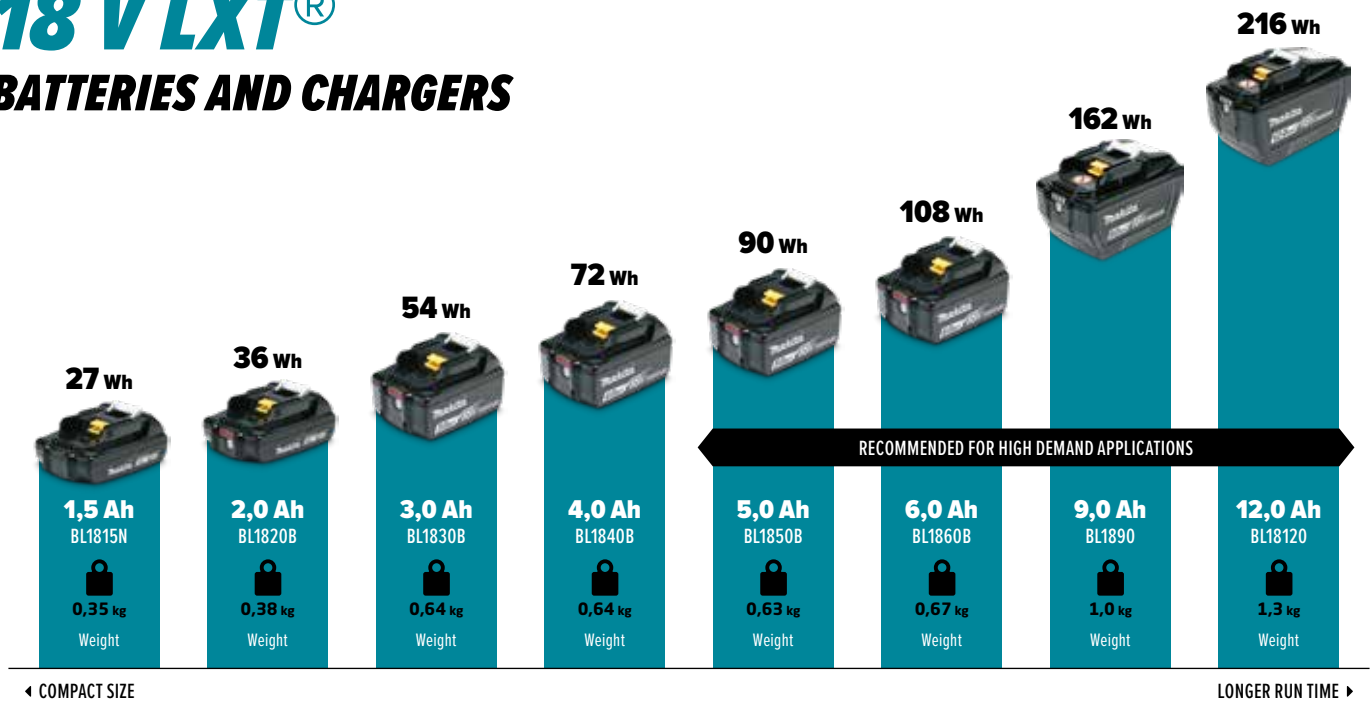

LXT

DC18RC

18 V LXT® Rapid charger

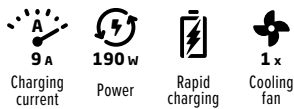


Charging times for one battery

BL1815N / 1,5 Ah	15 min
BL1820B / 2,0 Ah	24 min
BL1830B / 3,0 Ah	22 min
BL1840B / 4,0 Ah	36 min
BL1850B / 5,0 Ah	45 min
BL1860B / 6,0 Ah	55 min
BL1890 / 9,0 Ah	85 min
BL18120 / 12,0 Ah	120 min

LXT


DC18RD

18 V LXT® Dual rapid charger

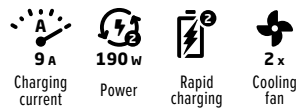

Charging times for two batteries


BL1815N / 1,5 Ah	15 min
BL1820B / 2,0 Ah	24 min
BL1830B / 3,0 Ah	22 min
BL1840B / 4,0 Ah	36 min
BL1850B / 5,0 Ah	45 min
BL1860B / 6,0 Ah	55 min
BL1890 / 9,0 Ah	85 min
BL18120 / 12,0 Ah	120 min

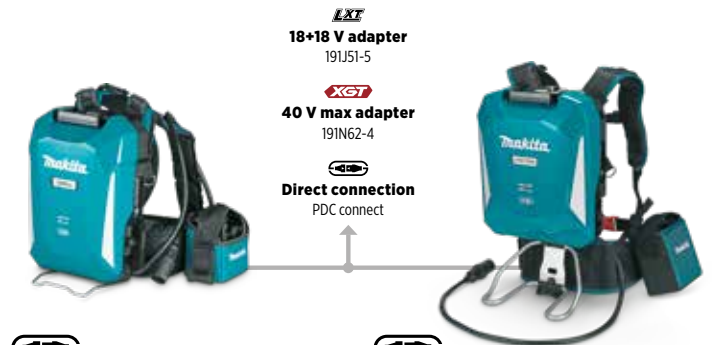

PDC1200A01

XGT LXT

Portable power pack

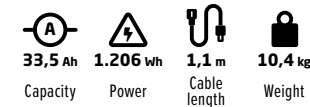

6x greater capacity than 2x 6,0 Ah 18 V LXT batteries


Charging time (charger 191L00-4) 360 min



PDC1500A01

XGT LXT

Portable power pack

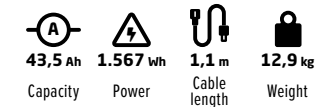

Up to 30% greater capacity than PDC1200

Charging time (charger 191L00-4) 450 min

BAC01


Power converter

BAC01 is a voltage converter that, when connected to a portable power pack (PDC01 / PDC1200 / PDC1500), serves as an ideal alternative to small petrol generators, allowing a wide range of electrical devices to be powered:

Sensitive electronic devices (laptops, tablets, mobile phones, radios, etc.)

Chargers for charging batteries

Kettles, fans, electric blankets, etc.

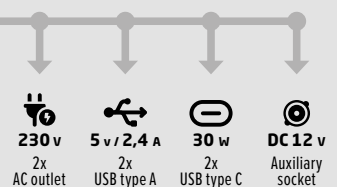

PDC1200 / PDC1500 output power 1.400 W
PDC01 output power 750 W

180%
HIGHER
TYING STRENGTH



DTR180
DTR81

TR001G

*COMPARED TO OUR 18 V LXT MODELS



XGT
TR001G

BL
MOTOR CORE

40 V max XGT® Rebar tying tool



1,6 mm
Wire
diameter



0,7 s
Tying
speed



240
No. of ties
per reel



Tightening
mechanism



Tying
strength

Maximum tying capacity of (2×D16) x (2×D16) rebar;
minimum tying capacity of D10 x D10 rebar or wire mesh x
wire mesh

Dual BL motors for twisting and feeding ensure stable tying
with 1,6 mm wire

Equipped with a tightening mechanism for 180% higher
tying strength compared to our 18 V models

TR001GZ / without batteries and charger

BENE

4x
FASTER



*COMPARED TO MANUAL TYING

WIRE TIGHTENING

Equipped with a wire tightening mechanism, the
tool holds one end in place and pulls back on the
opposite for 180% stronger ties compared to LXT
models. Ideal for tying vertical structures.

TR001G only



VERSATILITY

Thanks to the larger jaw capacity, the tool can be
used for effective hose management. Hoses can
be tied to rebar structures for better organisation.

TR001G only



x2							x3							x4			
×	D10	D13	D16	D19	D22	D25	×	D10×2	D13×2	D16×2	D19×2	D22×2	D25×2	×	D10×2	D13×2	D16×2
TR001G	D10	✓					D10	✓	✓	✓	✓	✓	✓	D10×2	✓		
	D13	✓	✓				D13	✓	✓	✓	✓	✓		D13×2	✓	✓	
	D16	✓	✓	✓			D16	✓	✓	✓	✓	✓		D16×2	✓	✓	✓
	D19	✓	✓	✓	✓		D19	✓	✓	✓	✓	✓		D19×2			
	D22	✓	✓	✓	✓	✓	D22	✓	✓	✓	✓	✓		D22×2			
	D25	✓	✓	✓	✓	✓	D25	✓	✓	✓	✓	✓		D25×2			
	D29	✓	✓	✓	✓	✓	D29	✓	✓	✓	✓	✓		D29×2			
	D32	✓	✓	✓	✓	✓	D32	✓	✓	✓	✓	✓		D32×2			
	D35	✓	✓	✓	✓	✓	D35							D35×2			

1915N0-0

Annealed tie wire, Ø1,6 mm,
30 m, 32 reels
TR001G



1915N6-8

Extension handle,
62,5-80 cm
DTR180, DTR181, TR001G



EFITS



LOWER COST

*COMPARED TO MANUAL TYING

STAYING ON SCHEDULE

Using a rebar tying tool significantly reduces worker fatigue by automating the repetitive motion of manual tying. This leads to improved efficiency, making projects easier to manage and more likely to stay on schedule.



EASY TO LEARN & USE

Rebar tying tools are easy to use and quick to learn, even for workers with no prior experience. They require minimal training and ensure consistent tying quality, boosting efficiency and overall productivity on the job site.



LXT

DTR181

BL

18 V LXT® Rebar tying tool



0,8 mm
Wire diameter



1,3 s
Tying speed



75
No. of ties per reel



Tying strength

Maximum tying capacity of (2×D13) x (2×D16) rebar; minimum tying capacity of D13 x D13 rebar

Fast and easy wire reel load design with automatic locking mechanism built into protective cover

2-mode operation provides single or continuous wire tie actuation

DTR181ZJ / without batteries and charger and with Makpac case



LXT

DTR180

BL

18 V LXT® Rebar tying tool



0,8 mm
Wire diameter



0,9 s
Tying speed



120
No. of ties per reel



Tying strength

Maximum tying capacity of (2×D13) x (2×D13) rebar; minimum tying capacity of D10 x D10 rebar

Fast and easy wire reel load design with automatic locking mechanism built into protective cover

2-mode operation provides single or continuous wire tie actuation

DTR180ZK / without batteries and charger and with plastic case



 x2								 x3								 x4			
DTR180	x	D10	D13	D16	D19	D22	D25	x	D10×2	D13×2	D16×2	D19×2	D22×2	D25×2	x	D10×2	D13×2	D16×2	
	D10	✓	✓	✓				D10	✓	✓					D10×2	✓	✓		
	D13	✓	✓	✓				D13	✓	✓					D13×2	✓	✓		
	D16	✓	✓	✓				D16	✓						D16×2				
DTR181	x	D10	D13	D16	D19	D22	D25	x	D10×2	D13×2	D16×2	D19×2	D22×2	D25×2	x	D10×2	D13×2	D16×2	
	D10							D10		✓	✓				D10×2	✓	✓		
	D13				✓	✓	✓	D13		✓	✓				D13×2	✓	✓		
	D16			✓	✓	✓	✓	D16	✓	✓	✓				D16×2	✓	✓		
	D19		✓	✓	✓	✓	✓	D19	✓	✓	✓	✓			D19×2				
	D22		✓	✓	✓	✓	✓	D22	✓	✓	✓	✓			D22×2				
	D25		✓	✓	✓	✓		D25	✓	✓	✓				D25×2				
	D29		✓	✓	✓	✓		D29							D29×2				
	D32		✓	✓	✓			D32							D32×2				
	D35		✓					D35							D35×2				

191J59-9

Poly coated tie wire, Ø0,8 mm, 100 m, 50 reels
DTR180, DTR181



199137-9

Tie wire, Ø0,8 mm, 100 m, 50 reels
DTR180, DTR181





XGT SC001G

40 V max XGT® Steel rod cutter



3-16 mm
Cutting capacity



1.7 s
Cutting speed



Rotatable head

Adjustable stopper holds the rebar at 90° to the cutting blade and assists with cutting stability

Anti-scattering protector prevents cut pieces from flying toward the operator

Spark free cutting of rebar and steel rod

SC001GZK / without batteries and charger and with plastic case



XGT SC002G

40 V max XGT® Steel rod cutter



10-25 mm
Cutting capacity



4 s
Cutting speed



2.5 mm
Flush cutting

Carbide-tipped blade delivers clean burr-free cutting with minimal spark emission for easy installation of nuts

Stopper holds the rebar at 90° to the cutting blade for faster and more precise cuts

Three position adjustable side handle for operator comfort and convenience

SC002GZK / without batteries and charger and with plastic case



XGT GA038G

40 V max XGT® Angle grinder



230 mm
Wheel diameter



1.700 W
Max. output power



73 mm
Cutting depth



Soft start



Electric brake

AWS® uses Bluetooth technology to automatically turn the vacuum cleaner on or off when you start or stop the tool

AFT® turns the motor off if rotation of the wheel is suddenly forced to stop

GA038GZ / without batteries and charger
GA038GT201 / with rapid charger DC40RA,
5.0 Ah battery BL4050F and plastic case



LXT SERIES

DSC163

LXT® Steel rod cutter



LXT SERIES

DSC251

LXT® Steel rod cutter



73 mm **MAXIMUM CUTTING DEPTH**

SC09003470

Blade set
SC001G



E-11097

TCT saw blade,
110 mm, 24T
SC002G, DSC251



DUST EXTRACTION ATTACHMENT

- Maximum cutting depth 60 mm
- Plunge feature
- Adjustable depth stops
- 360° dust port



198440-5
GA038G

198900-7

AWS wireless transmitter,
WUT01
GA038G



B-54025

Nebula diamond wheel,
reinforced concrete, 230 mm
GA038G



A-85335


Abrasive cutting wheel,
steel, 230 mm
GA038G





XGT
VR004G

40 V max XGT® Concrete vibrator

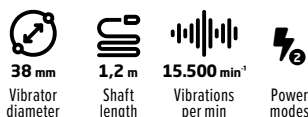

Dual directional switch to conveniently hold the tool in either horizontal or vertical positions
Protective cover helps prevent battery contamination
Constant speed control allows for stable compaction work
Lock-on switch reduces hand fatigue in long continuous operation

VR004GZ / without batteries and charger
and with Ø38 mm / 1,2 m flexible shaft



XGT
VL001G

40 V max XGT® Screed




Lightweight design provides excellent manoeuvrability, while constant speed control helps maintain stable vibration for efficient finishing work
3 interchangeable screed blades: 90 cm / 140 cm / 180 cm
Equipped with a lock-on button for comfortable continuous operation

VL001GZ / without batteries, charger and screed blade



XGT
UT002G

40 V max XGT® Mixer

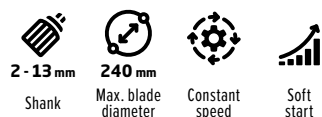

Mechanical 2-speed gearing (0-500 / 0-920 min⁻¹) combined with variable speed control by trigger
Protective cover helps prevent splattered material from contaminating the battery
Soft start minimizes splatter of material at the start of mixing

UT002GZ / without batteries and charger



LXT SERIES
DVR450
LXT® Concrete vibrator



**3 INTERCHANGEABLE
SCREED BLADES**



FLEXIBLE SHAFTS

- Effective air bubble removal range is approximately 10x the diameter of the vibrating head

1910E1-5
Ø32 mm / 1,2 m
VR004G

1910C2-9
Ø32 mm / 2,4 m
VR004G

1910E2-3
Ø32 mm / 1,7 m
VR004G

1910C4-5
Ø38 mm / 2,4 m
VR004G



SCREED BLADES

- The blades are easy to install/remove by using a lever



1917D5-2
90 cm
VL001G

1917D4-4
140 cm
VL001G

1917D3-6
180 cm
VL001G

D-73542

Mixing paddle for viscose materials (glue, cement, mortar, plaster), 120x600 mm, 0-20 kg
UT002G



D-73536

Mixing paddle for liquids (wall paints, varnishes, epoxy, gypsum plaster), 120x600 mm, 0-15 kg
UT002G






XGT LXT CXT

SKR001

XGT®/ LXT®/ CXT® Rotary green laser

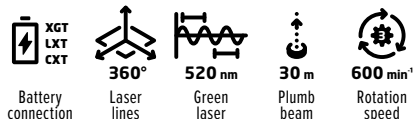

Dual slope laser for levelling and complex grading of pipes, ramps and job sites requiring drainage in two directions

Compatible battery platforms: XGT* / LXT / CXT* (*with adapter)

Operating range of 800 m with digital receiver for long-distance applications and superior accuracy

SKR001Z / without batteries and charger and with LXT battery tray




XGT

HS012G

BL AWS

40 V max XGT® Circular saw

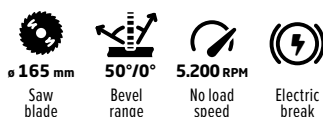

Cutting capacity of 57 mm (0°), 41 mm (45°) and 37 mm (50°)

Can be used with guide rails when fitted with optional adapter 196935-0

Die-cast magnesium base, blade guard, and blade cover provide a lightweight and durable design

HS012GZ / without batteries and charger
HS012GD201 / with rapid charger DC40RA, 2x 2,5 Ah battery BL4025 and Makpac case




XGT

HS004G

BL ADT AWS

40 V max XGT® Circular saw

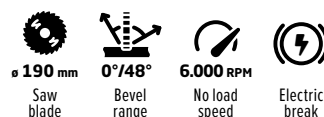


Cutting capacity of 62,5 mm (0°), 44,5 mm (45°) and 42 mm (48°)

Saw base is directly compatible with guide rails to provide precise straight or bevel cutting

Die-cast magnesium base, blade guard, and blade cover provide a lightweight and durable design

HS004GZ / without batteries and charger
HS004GM202 / with rapid charger DC40RA, 2x 4,0 Ah battery BL4040 and Makpac case

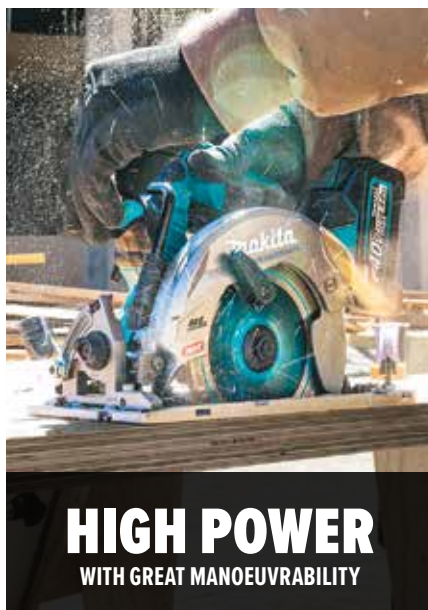

HIGH POWER
WITH GREAT MANOEUVRABILITY



DIRECTLY COMPATIBLE
WITH OPTIONAL GUIDE RAILS

LE00981913

Battery adapter for XGT batteries
SKR001



LE00981929

Remote control
SKR001



P-81315

Tripod,
1.000-2.700 mm
SKR001

B-62985

EFFICUT TCT saw blade,
wood, 165 mm, 25T
HS012G



B-64191

EFFICUT TCT saw blade,
wood, 190 mm, 24T
HS004G



1913K7-3

Parallel guide
FOR GUIDE RAILS



199826-6

Quick-release
clamp
FOR GUIDE RAILS




1913K5-7

Quick-release
clamp set
FOR GUIDE RAILS



GUIDE RAILS

199140-0 1,0 m 199141-8 1,5 m
194925-9 1,9 m 194367-7 3,0 m






XGT LH001G

BL Makita AWS

40 V max XGT® Table top miter saw

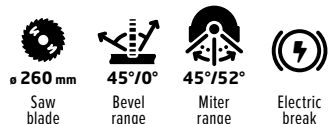

Cutting capacity of miter saw: (0°) 69x130 / 93x95 mm, (45°) 69x85 / 93x67 mm

Cutting capacity of table saw: (0°) 40 mm

LED light casts a shadow of the saw blade onto the material as an exact cutting line

LH001GZ / without batteries and charger



XGT UC026G

BL Makita

40 V max XGT® Chain saw



Excellent cutting performance, fast acceleration and good responsiveness

Adjustable automatic chain lubrication with large oil reservoir

Captive bar nuts retained in sprocket cover for convenient setup and maintenance

UC026GZ / without batteries and charger

UC026GT101 / with rapid charger DC40RA, 5,0 Ah battery BL4050F



XGT TD004G

BL Makita

40 V max XGT® Impact driver




Assist mode (T-mode) for faster tightening of self-drilling screws in thin metal; helps prevent damage to the screw or workpiece

Compact length at only 136 mm; ideal for working in tight spaces

TD004GZ / without batteries and charger

TD004GD201 / with rapid charger DC40RA, 2x 2,5 Ah battery BL4025 and Makpac case

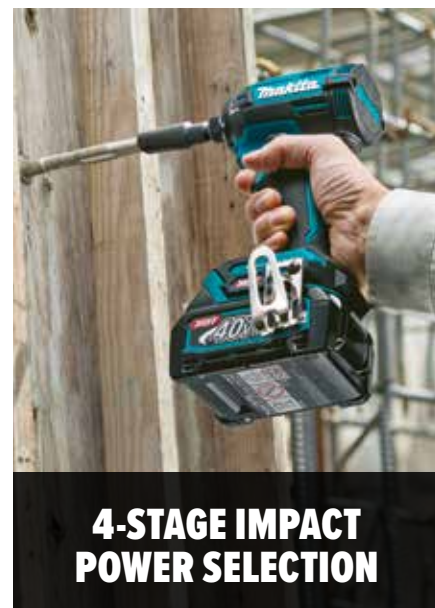

B-64630

TCT Effcut saw blade, wood, 260 mm, 45T
LH001G



B-67284

TCT Effcut saw blade, wood, 260 mm, 60T
LH001G



B-67290

TCT Effcut saw blade, wood, 260 mm, 80T
LH001G



NAILERS

IDEAL FOR STRENGTHENING FRAMEWORK

DBN601 - LXT®

16GA / 19-64 mm



DBN900 - LXT®

30° / Ø2,9-3,3 mm
50-90 mm



NUT SETTERS

Impact PREMIER, torsion, magnetic



Part	Size	Length	Shank
E-03458	6 mm	65 mm	1/4"
E-03464	8 mm	65 mm	1/4"
E-03470	10 mm	65 mm	1/4"
E-03486	13 mm	65 mm	1/4"


CUTTING AND GRINDING CONCRETE



XGT
CE001G

BL AFT

40+40 V max XGT® Power cutter

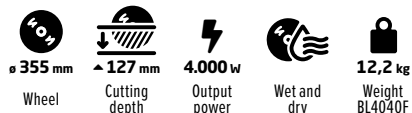

Adjustable blade guard facilitates cutting in low or upper wall zones

AFT® turns the motor off if rotation of the wheel is suddenly forced to stop

Integrated water delivery system with water flow adjustment knob continuously feeds water less dust during concrete cutting


CE001GZ01 / without batteries and charger



XGT
CE002G

BL AFT AWS

40+40 V max XGT® Power cutter

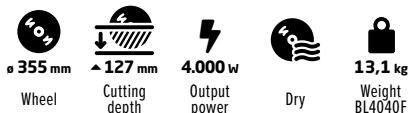

Dry-cutting model engineered for use with vacuum cleaners, ideal for indoor cutting

Capable of cutting 8-10 rebars (Ø16 mm) in a single pass

Anti-vibration housing dampens vibrations from cutting

Electric brake for maximum productivity


CE002GZ01 / without batteries and charger



XGT
CE004G

BL AFT

40 V max XGT® Power cutter

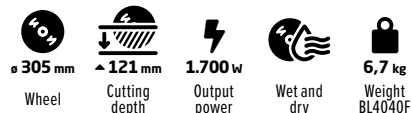

Adjustable blade guard facilitates cutting in low or upper wall zones

AFT® turns the motor off if rotation of the wheel is suddenly forced to stop

Lightweight at 6,7 kg and compact for better manoeuvrability

CE004GZ / without batteries and charger



WET CUTTING FOR EFFICIENT DUST CONTROL

- Enables long, accurate and clean cuts
- Efficient water delivery supports consistent water flow for dust control and blade cooling

1914H2-8

Cart with water supply
13 l
CE001G



- Connects garden sprayers (US053D, DUS054, DUS108, DUS158) with power cutters to use as a water tank

1915Y2-3

Power cutter water
hose kit
CE001G, CE004G, CE003G



DIAMOND BLADES




Part	Diameter	Cutting	Material
E-23226	355 mm	wet/dry	concrete
B-54031	300 mm		
E-02967	230 mm		
B-55348	355 mm	dry	multi-material / rescue
B-55332	300 mm		
B-55326	230 mm		



XGT CE003G

BL AFT

40 V max XGT® Power cutter

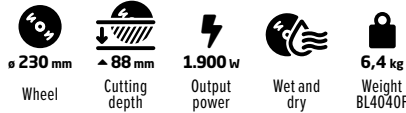

Adjustable blade guard facilitates cutting in low or upper wall zones

AFT® turns the motor off if rotation of the wheel is suddenly forced to stop

Electric brake stops the wheel in 2 seconds or less allowing for faster re-positioning


CE003GZ02 / without batteries and charger



XGT GA050G

BL AFT

40 V max XGT® Angle grinder

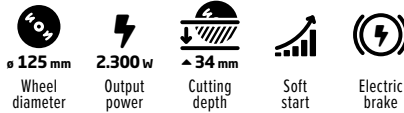

High work efficiency thanks to high speed BL motor with a rotation speed of 11.000 min⁻¹

AFT® turns the motor off if rotation of the wheel is suddenly forced to stop

Large paddle switch enables multiple grip positions


GA050GZ / without batteries and charger
GA050GT101 / with rapid charger DC40RA,
5,0 Ah battery BL4050F and Makpac case



XGT GA023G

BL AFT AWS

40 V max XGT® Angle grinder

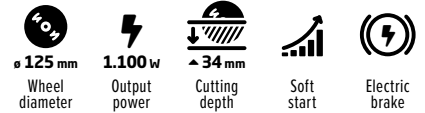

Variable speed control 3.000-8.500 min⁻¹ allows the adjustment of speed to match the application

AFT® turns the motor off if rotation of the wheel is suddenly forced to stop

GA023GZ / without batteries and charger
GA023GD201 / with rapid charger DC40RA, 2x
2,5 Ah battery BL4025 and Makpac case
GA023GM201 / with rapid charger DC40RA, 2x
4,0 Ah battery BL4040 and Makpac case
GA023GM204 / with rapid charger DC40RA, 2x 4,0 Ah
battery BL4040, loop handle, wheel cover, dust collection
cover, grinding wheel, offset dia. wheel and Makpac case



88 mm MAXIMUM CUTTING DEPTH



191G06-2
Dust collection attachment
for diamond blades
GA050G, GA023G



B-53992
Diamond blade,
125 mm
GA050G, GA023G



B-12778
Diamond blade,
125 mm
GA050G, GA023G



191W05-0
Dust collection attachment
for offset diamond wheels
GA050G, GA023G



B-48555
Offset diamond wheel,
125 mm, M14
GA050G, GA023G



B-48549
Offset diamond wheel,
125 mm, M14
GA050G, GA023G



458690-7
D-handle
GA023G



B-48533
Offset diamond wheel,
125 mm, M14
GA050G, GA023G



B-38560
Offset diamond wheel,
125 mm, M14
GA050G, GA023G






XGT HM001G

BL
MOTOR
AWS
AVT-SOFT
NO-LOAD

40 V max XGT® Demolition hammer

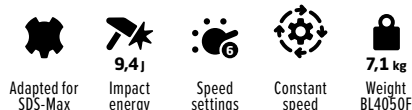

Anti-Vibration Technology (AVT®) is an internal counterbalance system along with vibration-absorbing handles that work together to reduce vibration
Side handle swivels 360° for increased manoeuvrability


HM001GZ02 / without batteries and charger
HM001GM201 / with rapid charger DC40RA,
2x 4,0 Ah battery BL4040 and plastic case



XGT HM002G

BL
MOTOR
AWS
AVT-SOFT
NO-LOAD

40+40 V max XGT® Demolition hammer

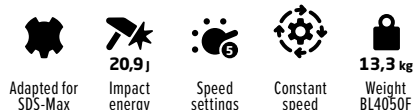

Side handle swivels 360° for increased manoeuvrability
Anti-Vibration Technology (AVT®) is an internal counterbalance system along with vibration-absorbing handles that work together to reduce vibration
Twin LED lights with preglow and afterglow functions

HM002GZ03 / without batteries and charger



XGT HM004G

BL
MOTOR
AWS
AVT-SOFT
NO-LOAD

40+40 V max XGT® Demolition hammer




AVT® and vibration-absorbing handles work together to reduce up to 30% less overall vibration
Soft start suppresses start-up reaction for improved accuracy
Twin LED lights with preglow and afterglow functions
Hammer trolley is available (optional accessory)

HM004GZ01 / without batteries and charger



HM004G

SDS-MAX FOR HEAVY DUTY APPLICATIONS
POWERFUL IMPACT ENERGY



B-23064
Self-sharpening bull point, 400 mm
For SDS-Max



E-26630
Cold chisel, 25 mm, 600 mm
For SDS-Max

199144-2
Vacuum attachment for hammer drilling and chiselling
HM001G, HM002G




TRANSPORT TROLLEY

- Large push handle
- Strap for securing the hammer
- Storage compartments for chisels, batteries and charger



JM00000674
HM004G



B-10372
Self-sharpening bull point, 400 mm
28,6 HEX



D-61547
Cold chisel, 28 mm, 410 mm
28,6 HEX

197148-8
Vacuum attachment for hammer drilling and chiselling
HM004G





VC006GM



40+40 V max XGT® Vacuum cleaner



15 kPa
Sealed suction



350 W
Suction power



40/30 l
Dry/wet capacity



M
Dust class



X
Variable power

Automatic self-cleaning filter system shakes the dust off the pre-filter to maintain optimal suction and longer filter life

Plastic tank with a water drain for easier emptying

Makpac case can be attached directly to provide additional storage

VC006GMZ01 / without batteries and charger



VC009G



40 V max XGT® Backpack vacuum cleaner



18 kPa
Sealed suction



165 W
Suction power



1,5 l
Dry capacity



Power settings



5,3 kg
Weight BL4080F

Ultimate portability for overhead construction, job site obstacles, and limited space

Efficient two stage HEPA filtration system captures 99.97% of particulates 0,3 microns and larger

Padded shoulder straps and waist belt with multiple adjustments for improved fit and comfort

VC009GZ01 / without batteries and charger



VC013GL



40 V max XGT® Vacuum cleaner



15 kPa
Sealed suction



165 W
Suction power



7,4/4,5 l
Dry/wet capacity



X
Variable power



6,2 kg
Weight BL4080F

Two tools in one; quickly converts from vacuum to blower for increased versatility

Filter cleaning system is designed to maintain optimum suction efficiency and longer filter life

Efficient HEPA filter captures 99.97% of particulates 0,3 microns and larger

VC013GLZ01 / without batteries and charger



AUTO START WIRELESS SYSTEM

AWS® uses Bluetooth® technology for wireless power-on and power-off communication between the equipped tool and dust extractor.

AWS® is intelligent communication that eliminates cords and excessive noise since the dust extractor runs only when trigger-activated by an AWS® tool. When the trigger is released, the dust extractor powers-down. The expanding AWS system includes vacuum cleaners and tools for concrete, metal and woodworking.



198900-7

WUT01
AWS wireless transmitter



199742-2

WUT02
Adapter for electric vacuum cleaner



191565-1

Caster wheel set
VC013GL



199486-4

Shoulder strap
VC013GL



1915T4-4

Wet filter
VC013GL






XGT HR006G

BL AWS AFT AVT+SOFT

40+40 V max XGT® Rotary hammer

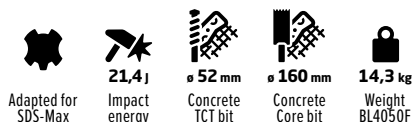

Two 40 V max XGT batteries and BL motor work together to deliver power and run time for the most demanding applications

Advanced Anti-vibration technology with a 3-component system (counterweight, damper spring and anti-vibration housing) that sets new standards in vibration reduction


HR006GZ / without batteries and charger



XGT HR005G

BL AWS AFT AVT+SOFT

40 V max XGT® Rotary hammer

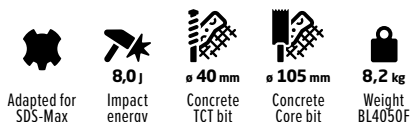

Powerful BL motor delivers 1.450-2.900 blows per minute and 8,0 J of impact energy to handle demanding applications

Advanced Anti-vibration technology with a 3-component system (counterweight, damper spring and anti-vibration housing) that sets new standards in vibration reduction


HR005GZ01 / without batteries and charger
HR005GM202 / with rapid charger DC40RA, 2x 4,0 Ah battery BL4040 and plastic case



XGT HR012G

BL AWS AFT AVT

40 V max XGT® Combination hammer

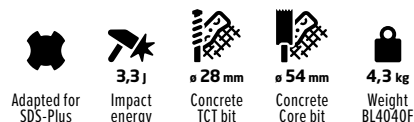

Can be equipped with DX18 attachment for excellent dust extraction and manoeuvrability especially for overhead applications

3-mode operation: rotation only, hammering with rotation or hammering only for multiple applications

HR012GZ / without batteries and charger
HR012GU201 / with rapid charger DC40RA, 2x 4,0 Ah battery BL4040F and Makpac case



SDS-MAX FOR HEAVY DUTY APPLICATIONS
POWERFUL IMPACT ENERGY

SDS-MAX DUST EXTRACTION

199144-2

Dust extractor attachment for chiselling
HR006G / HR005G



199142-6

Dust extractor attachment for drilling / chiselling
HR005G



- Universal dust extraction adapter for drilling up to a maximum drilling diameter of 52 mm.
- The adapter automatically attaches to flat surfaces – such as walls, ceilings, or floors – thanks to the vacuum cleaner's negative pressure.

1914X3-8

Dust extractor attachment for drilling
UNIVERSAL



E-20127

Concrete core cutter, Ø55 mm, 990 mm
For SDS-Max



E-20111

Concrete core cutter, Ø55 mm, 550 mm
For SDS-Max



D-74011

Core bit, Ø68 mm, 50 mm
For SDS-Plus






XGT HR007G

BL AWS AFT AVT

40 V max XGT® Combination hammer

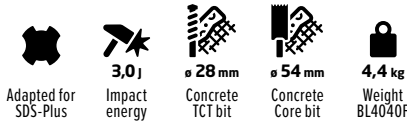

Can be equipped with DX15 attachment for excellent dust extraction and manoeuvrability especially for overhead applications

Active Feedback-Sensing Technology (AFT®) electronically turns off the motor if rotation of bit is suddenly forced to stop


HR007GZ / without batteries and charger
HR007GM201 / with rapid charger DC40RA,
 2x 4,0 Ah battery BL4040 and plastic case



XGT HR1010G

BL AWS AVT

40 V max XGT® Combination hammer

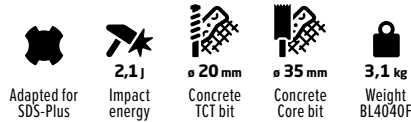

Compact and lightweight design, key for overhead applications

Electric brake allows the tool to be repositioned faster for maximum productivity

3-mode operation: rotation only, hammering with rotation or hammering only for multiple applications


HR1010GZ / without batteries and charger



XGT AS001G

BL

40 V max XGT® Dust blower

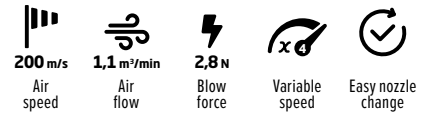

High-speed blower with a wide range of attachments, ideal for cleaning tools and filters and for removing concrete dust from pilot holes prepared for anchors

Filter on blower intake reduces dust being blown through the blower

LED job light with preglow and afterglow functions

AS001GZ / without batteries and charger



SDS-PLUS DUST EXTRACTION

1914M0-7

Dust extractor attachment for chiselling
 HR012G



1917K7-7

Dust extractor attachment for chiselling
 SDS-PLUS hammers



SIBDX18

Dust collection attachment DX18, max. Ø28 / 265 mm
 HR012G



122B81-7

Dust collection attachment DX15, max. Ø28 / 260 mm
 HR007G



1911P2-6

Dust collection attachment DX16, max. Ø20 / 165 mm
 HR010G



191X78-9

Long nozzle set, Ø8 mm
 AS001G



191X21-8

Flexible nozzle, Ø6 mm
 AS001G




191X29-2

Filter
 AS001G



ROTARY HAMMERS IMPACT ENERGY

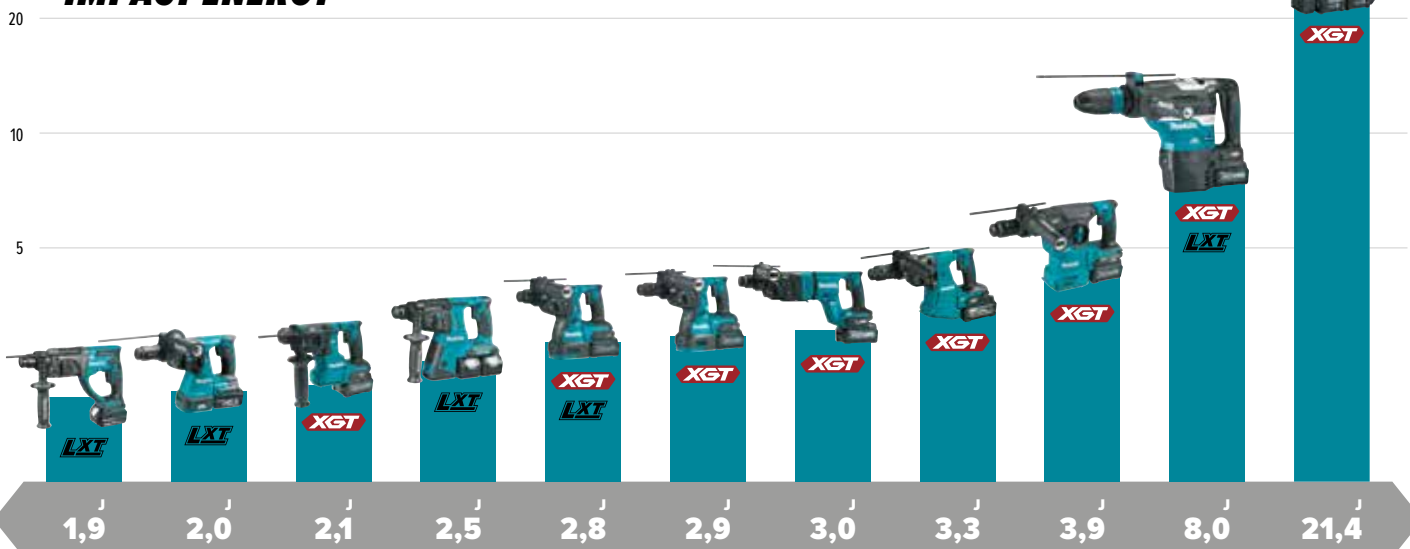


Adapted for SDS-PLUS

Adapted for SDS-MAX

3,2-20 4-12	3,2-24 4-16	3,2-20 3,2-12	3,2-26 4-18	3,2-28 6-20	3,2-28 6-20	3,2-28 6-20	3,2-28 6-20	6-30 8-22	10-40 16-35	19-52 25-45
DHR241 4,0 kg	DHR243 3,7 kg DX07	HR010G 3,1 kg DX16	DHR263 5,1 kg	HR003G 4,6 kg DX12	HR002G 4,5 kg DX14	HR007G 4,4 kg DX15	HR011G 4,0 kg DX17	HR008G 5,5 kg DX10	HR005G 8,2 kg	HR006G 14,3 kg
DHR202 4,0 kg				DHR283 4,9 kg DX09			HR012G 4,3 kg DX18	HR009G 5,6 kg DX11	DHR400 8,1 kg	
				DHR280 4,9 kg DX08						

VACUUM CLEANERS PERFORMANCE

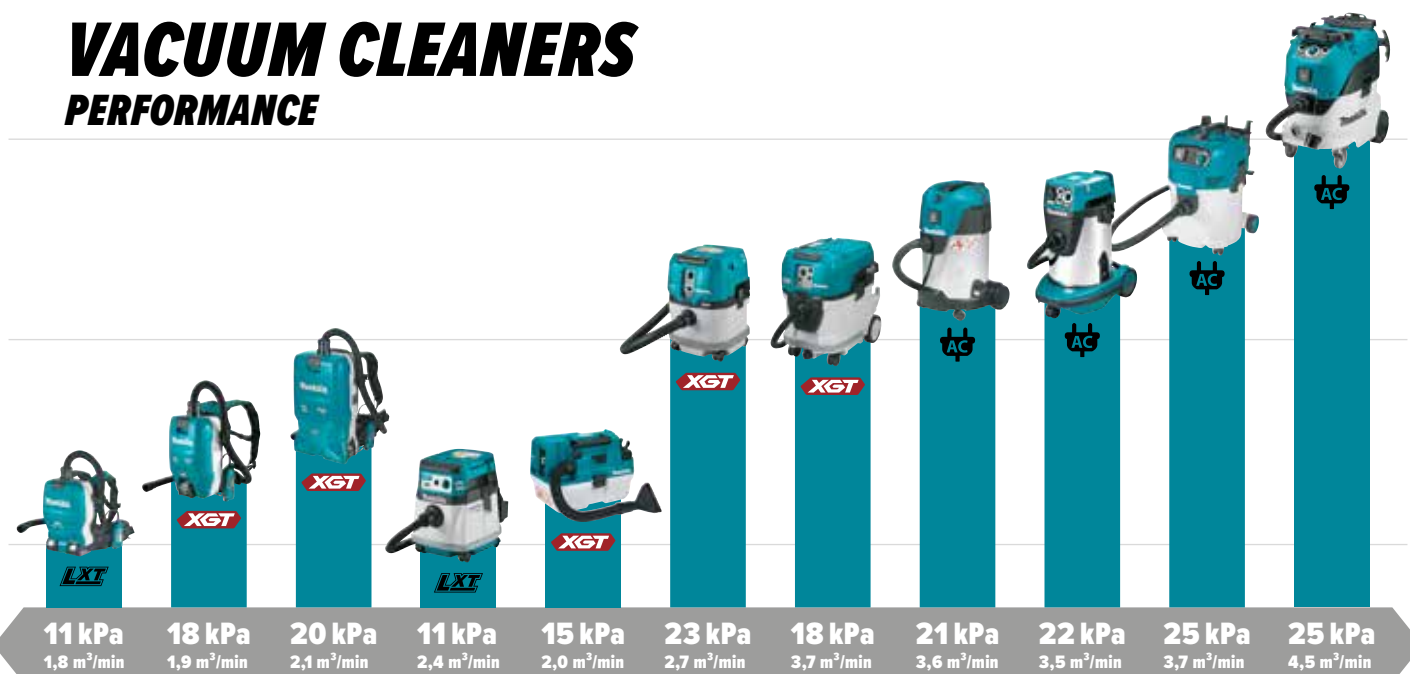

DVC265 21	VC009G 21	VC012G 61	DVC157L 151	VC013GL 7,51 4,51	VC004GL 151	VC006GM 401 301	VC3011L 261 231	VC3211H/M 321 271	VC3012L 241 191	VC4210M/L 341 301
		DVC867L 81					VC2512L 211 181	VC3210L 321 271		
							VC2012L 151 121	VC2211M 221 171		

Compatible / recommended
size range of TCT drill bits

DX Dust extractor
attachment

Quick change chuck


Dry capacity

Wet capacity



DBM131

Diamond core wet drill

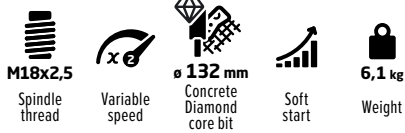


Equipped with residual current circuit breaker
Built-in (safety) slip clutch, soft start, and engine temperature monitoring

DBM131 / with metal case



DBM230

Diamond core wet drill

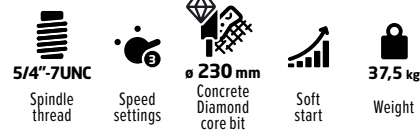

Equipped with residual current circuit breaker
Built-in (safety) slip clutch, soft start, and engine temperature monitoring

DBM230




EQUIPPED WITH DUST PORT
FOR CONNECTING TO DUST EXTRACTOR



SG1251

Wall chaser

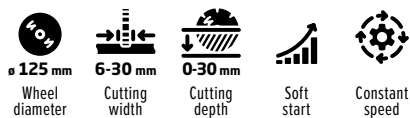


For milling conduit and electrical trenches in stone, concrete, cement boards, sand-lime brick and plasterboard

SG1251J / with Makpac case



SG150

Wall chaser

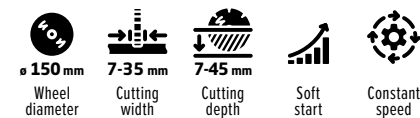


Good stability during movement due to wide guide rollers
Equipped with dust port for connecting a vacuum cleaner

SG150 / with metal case



SG181

Wall chaser

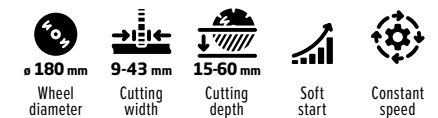

For sanitary installations such as concealed pipes and drains
Equipped with dust port for connecting a vacuum cleaner

SG181 / with plastic case

P-40082
Drill stand for magnetic core drill
DBM131



P-54190
Drill stand for magnetic core drill
DBM230



P-40098
Mounting accessory for drill stand
DBM230



B-12778
Diamond blade, 125 mm
SG1251



B-27187
Diamond blade, 150 mm
SG150



B-27193
Diamond blade, 180 mm
SG181





XGT TW009G

BL
MAKITA

40 V max XGT® Impact wrench



LED light ring provides 360° illumination to help eliminate shadows and illuminate a larger area

Full speed mode function reduces trigger pull to reach full speed

D-Handle with 360° positioning and angle adjustment

TW009GZ / without batteries and charger
TW009GT201 / with rapid charger DC40RA, 2x
 5,0 Ah battery BL4050F and plastic case



XGT TW001G

BL
MAKITA

40 V max XGT® Impact wrench



Flexible joint isolates the battery from the grip to help reduce wear on the battery contacts

Compact length at only 213 mm; ideal for working in tight spaces

Full speed mode function reduces trigger pull to reach full speed

TW001GZ / without batteries and charger
TW001GU201 / with rapid charger DC40RA, 2x
 4,0 Ah battery BL4040F and Makpac case



XGT TW007G

BL
MAKITA

40 V max XGT® Impact wrench




Twin LED lights with preglow and afterglow functions for better illumination

Compact length at only 170 mm; ideal for working in tight spaces

Full speed mode function reduces trigger pull to reach full speed

TW007GZ / without batteries and charger
TW007GU201 / with rapid charger DC40RA, 2x
 4,0 Ah battery BL4040F and Makpac case

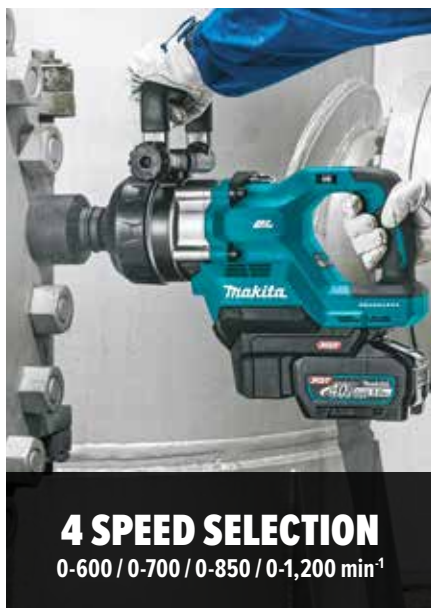

IMPACT DEEP SOCKETS

High quality CR-MO construction



EXTENSIONS


134870-6 134997-2 B-55712
 1" - 200 mm 3/4" - 150 mm 1/2" - 150 mm



Part	Shank	Dimensions	Part	Shank	Dimensions	Part	Shank	Dimensions
E-24773	1"	90x46 mm - M30	E-22399	3/4"	90x36 mm - M24	E-16542	1/2"	81,5x30 mm - M20
E-22420	1"	90x41 mm - M27	E-22383	3/4"	90x32 mm - M22	E-16520	1/2"	81,5x24 mm - M16
E-24739	1"	90x36 mm - M24	E-22377	3/4"	90x30 mm - M20	E-16499	1/2"	81,5x19 mm - M12
E-24701	1"	90x32 mm - M22	E-22355	3/4"	90x24 mm - M16	E-16477	1/2"	81,5x17 mm - M10

EXTENSION HANDLE

- For tightening nuts downwards without bending over
- Length adjustable in 5 stages 657-807 mm

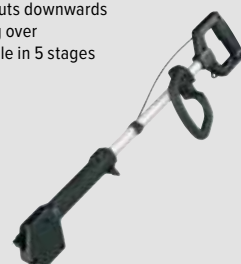

191667-2
 TW001G, TW007G



XGT

TW005G

BL

40 V max XGT® Impact wrench



1/2"

Shank



350 Nm

Fastening torque



630 Nm

Nut busting torque



Assist mode



Power selection

Compact length at only 144 mm; ideal for working in tight spaces

Full speed mode function reduces trigger pull to reach full speed

Twin LED lights with preglow and afterglow functions

TW005GZ / without batteries and charger

TW005GD201 / with rapid charger DC40RA, 2x 2,5 Ah battery BL4025 and Makpac case



LXT

DTD201

BL

18 V LXT® Impact driver



210 Nm

Fastening torque



T assist mode



Power selection



LED job light

T1 assist mode for faster tightening of self-drilling screws in thin gauge metal; helps prevent damage to the screw or workpiece

Features 2 LED lights for increased job sight visibility

Compact, lightweight design at just 121 mm in length and only 1,6 kg helps reduce operator fatigue

DTD201Z / without batteries and charger



LXT

DTD173

BL

18 V LXT® Impact driver



180 Nm

Fastening torque



T assist mode



Wood assist mode



Bolt assist mode



Power selection

T1 and T2 assist modes for faster tightening of self-drilling screws in thick or thin gauge metal

Wood assist mode for easier tightening of long screws

Bolt assist mode for preventing the loss of bolts/nuts when loosening

DTD173Z / without batteries and charger

DTD173ZJX2 / with Makpac case


DTD173RTJ / with rapid charger DC18RC, 2x 5,0 Ah battery BL1850B and Makpac case



PIN DETENT
SOCKET RETENTION SHANK



RING LED LIGHT
WITH 3 BRIGHTNESS SETTINGS

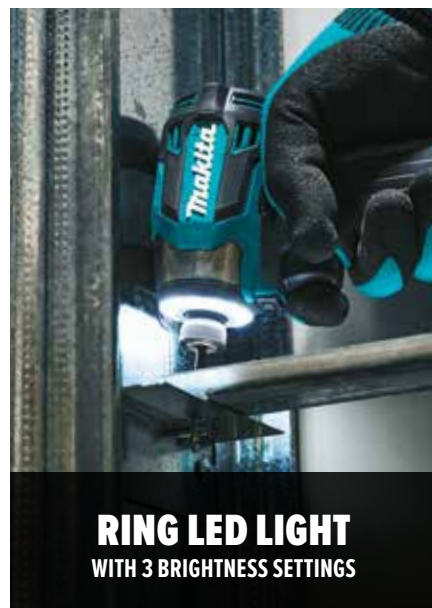

SAFETY GEAR



Model	1	2	Model	2
TW001G	191M83-0	-	TD002G	191F58-7
TW007G	1913P0-2	-	TD004G	191F58-7
TW005G	-	191F58-7	DTD201	199428-8
DTW1001	1913P0-2	-	DTD173	197043-2
DTW701	1913P0-2	-		
DTW301	-	199428-8		

SCREW BITS

Impact PREMIER, torsion



Part	Size	Length	Shank
E-03274	PH2	50 mm	1/4"
E-03280	PH3	50 mm	1/4"
E-03349	T20	50 mm	1/4"
E-03355	T25	50 mm	1/4"
E-03361	T30	50 mm	1/4"
E-12027	T40	50 mm	1/4"

BIT HOLDERS

E-20258 68 mm E-20264 150 mm



E-13568

Impact BLACK 90° angle attachment 1/4" hex shank



E-13568

5 pcs. Impact PREMIER screw bit set PH2, PZ2, PZ3, T25, T30





LXT

DTL300

BL

18 V LXT® Angle impact wrench



1/2"

Shank



340 Nm

Fastening torque



530 Nm

Nut busting torque



Assist mode



Power selection

1 forward and 1 reverse Auto-Stop assist modes for temporary fastening and preventing bolts/nuts from falling off during loosening

Low profile head, only 81 mm in height for reaching into tight spaces

C ring shank with hole

DTL300Z / without batteries and charger



LXT

DRV250

BL

18 V LXT® Rivet gun



6.4 mm

Max. rivet diameter



20.000 N

Pulling force



30 mm

Stroke length



26 mm

Head clearance



LED job light

Capable of pulling aluminium, steel, and stainless steel rivets

Tool holds rivet in place allowing the user to operate in any orientation

30 mm stroke sets most rivets in one stroke

DRV250Z / without batteries and charger



XGT

HP003G/DF003G

BL

40 V max XGT® Hammer / driver drill



1.5-13 mm

Chuck capacity



180 Nm

Fastening torque



20 mm

Capacity steel



50 mm

Capacity wood



20 mm

HP003G Capacity concrete

3-speed transmission provides optimal balance of speed and torque for maximum efficiency

HP003G model includes a hammer-drill mode that applies a percussive motion for drilling holes in concrete or masonry

HP003GZ / DF003GZ / without batteries and charger

HP003GU201 / DF003GU201 / with rapid charger DC40RA, 2x 4.0 Ah battery BL4040F and Makpac case



1/2" PIN DETENT SHANK MODEL

DTL301 - LXT®



HP003G
STEEL / WOOD
CONCRETE

DF003G
STEEL / WOOD

P-69967

Step drill bit for metal, 4-12 mm

DF003G, HP003G



P-69973

Step drill bit for metal, 4-20 mm

DF003G, HP003G



P-69989

Step drill bit for metal, 4-30 mm

DF003G, HP003G



HOLE SAWS

Ezchange



E-04070


Ezchange adapter with HSS-G centering drill (metals, aluminium, wood, PVC)

9,5 mm HEX shank




Part	Diameter	Height	Part	Diameter	Height	Part	Diameter	Height
E-03660	20 mm	44 mm	E-03822	51 mm	44 mm	E-03977	102 mm	44 mm
E-03698	25 mm	44 mm	E-03866	57 mm	44 mm	E-04020	114 mm	44 mm
E-03735	32 mm	44 mm	E-03903	68 mm	44 mm	E-04042	127 mm	44 mm
E-03779	40 mm	44 mm	E-03931	76 mm	44 mm	E-04064	152 mm	44 mm

IMPACT WRENCHES **MAX. FASTENING TORQUE**

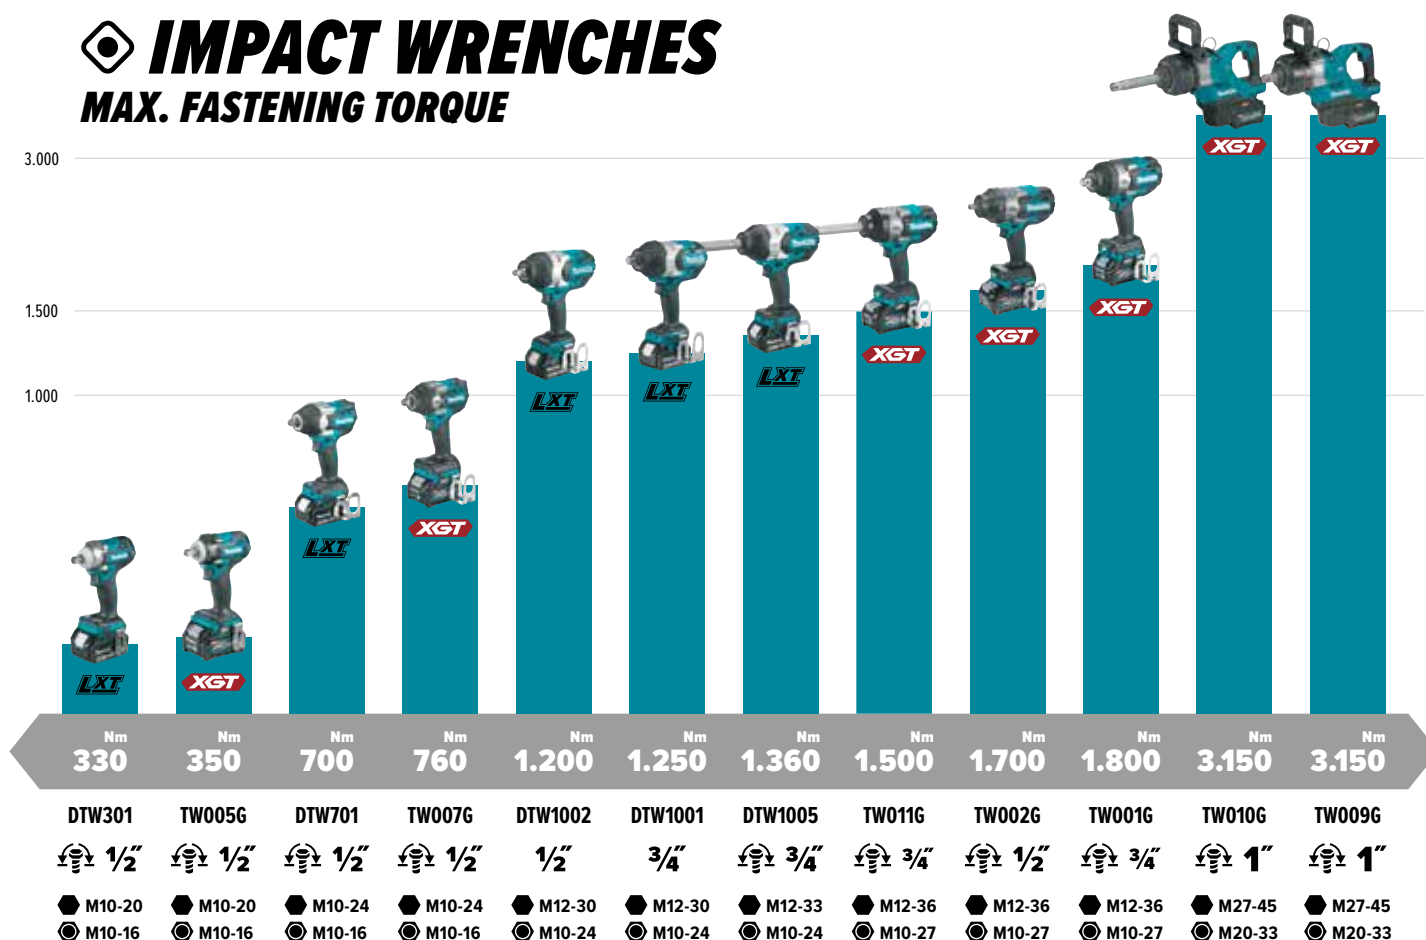

IMPACT DRIVERS **MAX. FASTENING TORQUE**

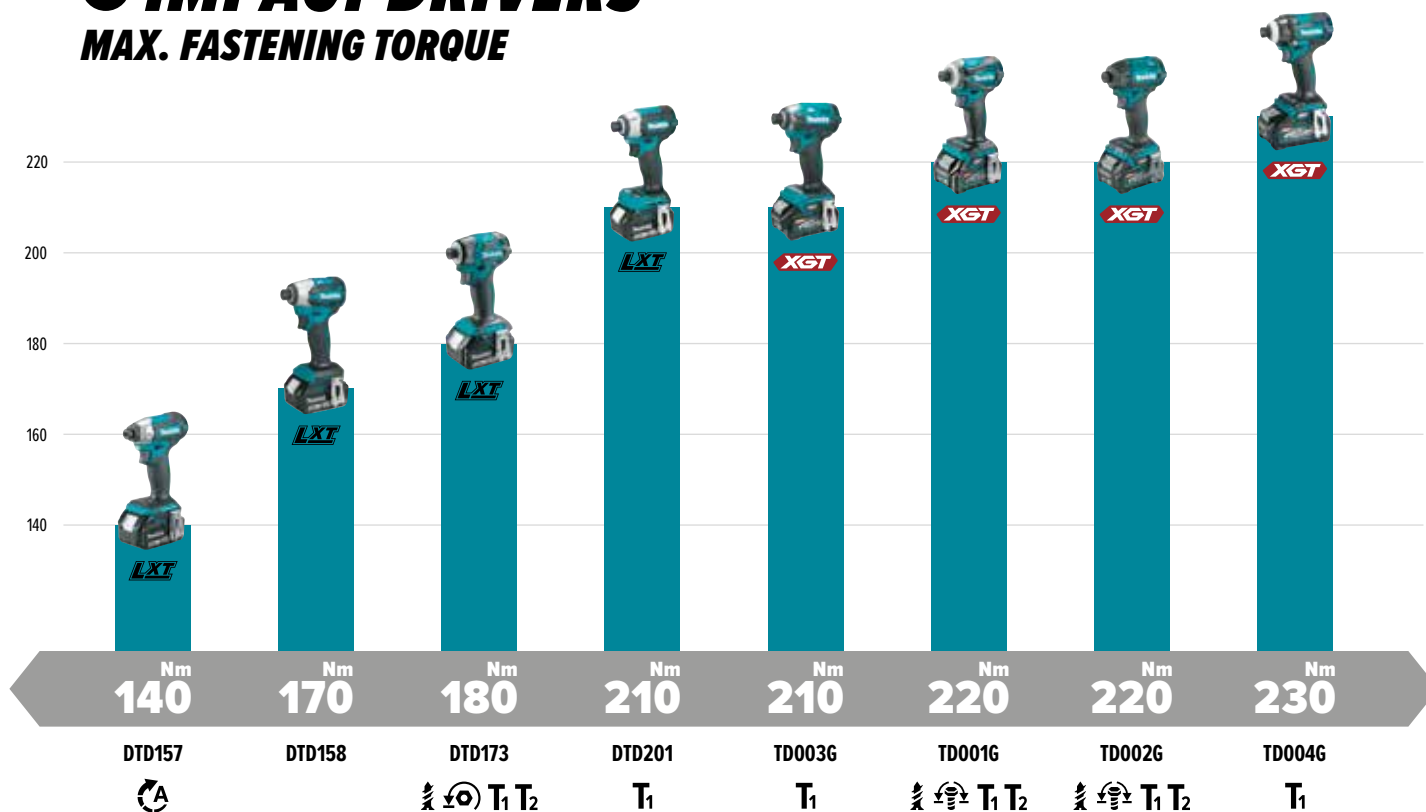

 Standard bolt
 High strength bolt

 Auto-stop assist modes
 tightening / loosening

 Auto-stop assist modes
 loosening

 Wood screw
 mode

 Teks screw mode
 for thin metal

 Teks screw mode
 for thick metal


 Assist mode for
 easier tightening



XGT PP001G

BL
MAKITA

40 V max XGT® Hole puncher



Grip handle rotates 360° allowing for optimal positioning in a variety of spaces

Adjustable depth guide allows for punch location adjustment up to 40 mm from the edge of the workpiece


PP001GZK / without batteries and charger



XGT GA055G

BL
MAKITA AFT

40 V max XGT® Flat-head angle grinder

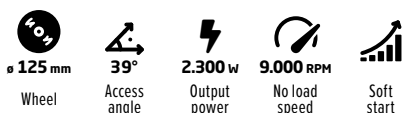

Efficient grinding in tight spaces with angles as small as 39°

Easy adjustment of wheel cover by lock lever

AFT® turns the motor off if rotation of the wheel is suddenly forced to stop

GA055GZ / without batteries and charger



XGT GD001G

BL
MAKITA AFT

40 V max XGT® Die grinder



8 mm collet fits up to 32 mm grinding wheel points and 52 mm cut-off wheels

Spindle lock for single wrench accessory changes

AFT® turns the motor off if rotation of the wheel is suddenly forced to stop

GD001GZ / without batteries and charger
GD001GU201 / with rapid charger DC40RA, 2x 4,0 Ah battery BL4040F and Makpac case



**EFFICIENT GRINDING
IN TIGHT SPACES**



**3 LED LIGHTS
FOR 360° ILLUMINATION**

A-80656

Grinding wheel, stainless steel, 125 mm, WA36N
GA055G



B-53942

Flap sanding wheel, 125 mm, Z80
GA055G



B-53958

Flap sanding wheel, 125 mm, Z120
GA055G



B-52744

Tungsten carbide burr, standard cut, 10x20 mm
GD001G



B-52772

Tungsten carbide burr, standard cut, 10x20 mm
GD001G



B-52803

Tungsten carbide burr, standard cut, 10x25 mm
GD001G



B-52750

Tungsten carbide burr, diamond cut, 10x20 mm
GD001G



B-52788

Tungsten carbide burr, diamond cut, 10x20 mm
GD001G




B-52819

Tungsten carbide burr, diamond cut, 10x25 mm
GD001G



ANGLE GRINDERS

MAX OUTPUT POWER

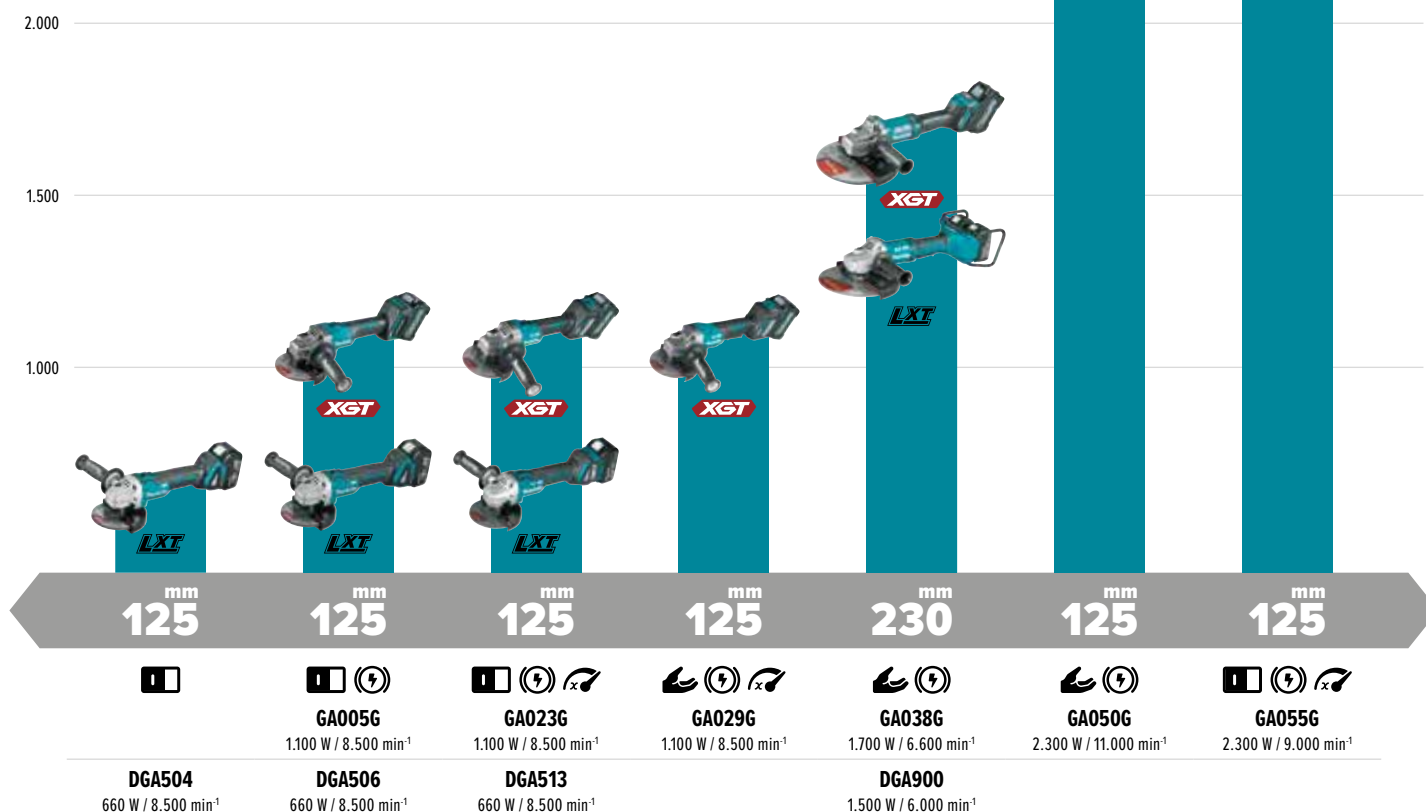


Slide switch
 Paddle switch
 Electric brake
 Variable speed



HB351

Magnetic drill

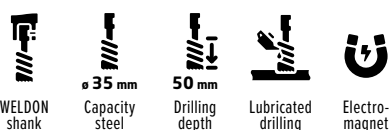

Powerful magnetic drilling for steel and other ferrous metals


Equipped with oil supply system for smooth drilling

HB351 / with plastic case and 1/2-20 UNF chuck adapter



HB501

Magnetic drill

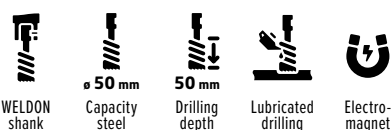

Powerful magnetic drilling for steel and other ferrous metals

Equipped with oil supply system for smooth drilling

HB501 / with plastic case

TCT CUTTERS

Cutting depth 35 mm
HB351, HB501



Part	Height	Part	Height
B-90641	12 mm	B-90716	26 mm
B-90657	14 mm	B-90722	28 mm
B-90663	16 mm	B-90738	32 mm
B-90679	18 mm	B-90744	36 mm
B-90685	20 mm	B-90750	40 mm
B-90691	22 mm	B-90766	50 mm
B-90700	24 mm		

TCT CUTTERS

Cutting depth 50 mm
HB351, HB501



Part	Height	Part	Height
B-90772	12 mm	B-90847	26 mm
B-90788	14 mm	B-90853	28 mm
B-90794	16 mm	B-90869	32 mm
B-90803	18 mm	B-90875	36 mm
B-90819	20 mm	B-90881	40 mm
B-90825	22 mm	B-90897	50 mm
B-90831	24 mm	B-90906	64 mm



LXT

DJN161

18 V LXT® Nibbler

1.900 RPM	360°	2,5 mm	1,6 mm	1,2 mm
Strokes per minute	Rotatable matrix	Aluminium 200 N/mm ²	Steel 400 N/mm ²	Steel 600 N/mm ²

Chip disposal is below cutting material to minimize damage to cutting surface

Cutting radius: inner edge 45 mm; outer edge 50 mm

Lock-on sliding switch for continuous operation

Thickness gauge for allowable cutting thickness for steel

DJN161Z / without batteries and charger



LXT

DJS200

18 V LXT® Metal shear

3.000 RPM	360°	2,5 mm	2,0 mm	1,6 mm
Strokes per minute	Rotatable head	Aluminium 200 N/mm ²	Steel 400 N/mm ²	Steel 600 N/mm ²

High performance double cut blade design minimizes material distortion with minimal burrs

Minimum cutting radius: 178 mm

Easily cuts through spiral duct seams

DJS200Z / without batteries and charger



XGT

CS002G

40 V max XGT® Metal cutter

185 mm	3.500 RPM			
Saw blade	No load speed	Chip collector	Electric break	LED job light

Large 67 mm cutting capacity in various metal materials including pipe, stud, channel, strut, conduit, angle, square tubing, sheet metal ...

On-board hex wrench for convenience

LED light with preglow and afterglow functions

CS002GZ / without batteries and charger



IDEAL FOR CUTTING ROOFING SHEET METAL



65 mm METAL STUDS IN SINGLE PASS

MATRIX AND PUNCH

A-15051
DJN161, matrix
A-83951
DJN161, punch pin



BLADES

725092-5
DJS200, right blade
725093-3
DJS200, left blade
725255-3
DJS200, centre blade



BAND SAWS

IDEAL FOR CUTTING PIPES AND PROFILES

PB002G - XGT®

Capacity 127 mm



PB003G - XGT®

Capacity 66 mm



TCT SAW BLADES



METAL

Part	Diameter	Hole	Teeth
E-12859	185 mm	30 mm	45T

METAL, STAINLESS STEEL


Part	Diameter	Hole	Teeth
E-12865	185 mm	30 mm	60T



XGT HS013G

BL
MOTOR
AWS

40 V max XGT® Circular saw

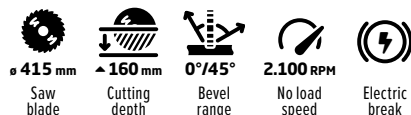

Cuts 160 mm (0°) and 106 mm (45°) in a single pass
Blade stabilizer for stable blade rotation and superior cutting performance
Soft start suppresses start-up reaction for improved accuracy


HS013GZ / without batteries and charger
HS013GT101 / with rapid charger DC40RA and 5,0 Ah battery BL4050F



XGT HS011G

BL
MOTOR
AWS

40 V max XGT® Circular saw

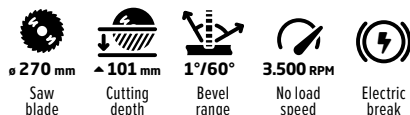

Cutting capacity of 101 mm (0°), 71 mm (45°) and 51 mm (60°)
Saw base is directly compatible with guide rails to provide precise straight or bevel cutting
Constant speed control minimizes reduction in rotation speed under load


HS011GZ / without batteries and charger
HS011GT201 / with rapid charger DC40RA and 2x 5,0 Ah battery BL4050F



XGT HS009G

BL
MOTOR
AWS

40 V max XGT® Circular saw

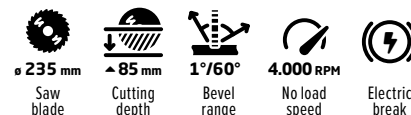


Cutting capacity of 85 mm (0°), 61 mm (45°) and 44 mm (60°)
Saw base is directly compatible with guide rails to provide precise straight or bevel cutting
Constant speed control minimizes reduction in rotation speed under load

HS009GZ / without batteries and charger
HS009GT201 / with rapid charger DC40RA and 2x 5,0 Ah battery BL4050F and plastic case



**COMPACT AND
ERGONOMIC**
DIE-CAST ALUMINIUM DESIGN

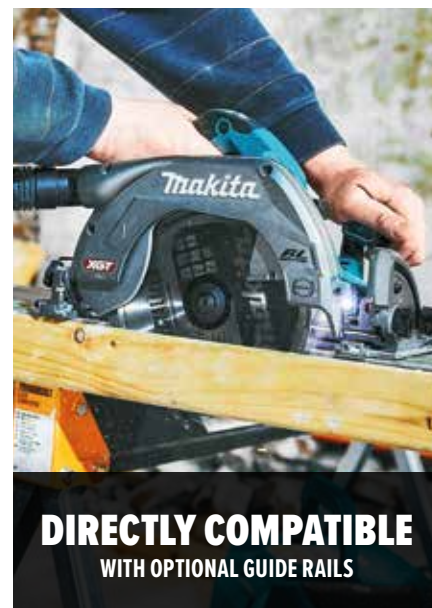

DIRECTLY COMPATIBLE
WITH OPTIONAL GUIDE RAILS

TCT SAW BLADES SANDWICH PANELS



Part	Diameter	Hole	Teeth
E-30209	415 mm	30 mm	90T
B-33607	355 mm	30 mm	80T
B-33598	270 mm	30 mm	60T
B-33582	235 mm	30 mm	50T
B-63149	165 mm	20 mm	42T

TCT SAW BLADES WOOD



Part	Diameter	Hole	Teeth
E-26886	415 mm	30 mm	35T
B-32188	355 mm	30 mm	24T
E-12946	270 mm	30 mm	24T
E-01915	235 mm	30 mm	24T
B-62985	165 mm	20 mm	25T

199826-6
Quick-release clamp
FOR GUIDE RAILS




1913K7-3
Parallel guide
FOR GUIDE RAILS



GUIDE RAILS

199140-0 1,0 m 199141-8 1,5 m
194925-9 1,9 m 194367-7 3,0 m






XGT

JR002G

BL AVT

40 V max XGT® Recipro saw

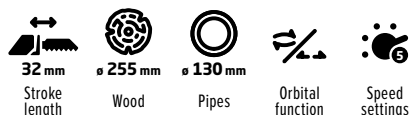

On/Off orbital feature provides more aggressive cuts in wood

Equipped with AVT®, an internal counterbalance system that delivers up to 50% less vibration

Electric brake for maximum productivity

JR002GZ / without batteries and charger
JR002GM201 / with rapid charger DC40RA, 2x 4,0 Ah battery BL4040 and plastic case




XGT

JR003G

BL

40 V max XGT® Recipro saw

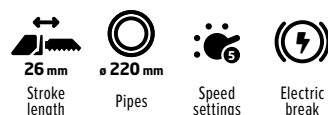

Built-in spring keeps the chain securely in place while wrapping and tightening around the pipe

The tool can also be used as a standard reciprocating saw by attaching the front grip and optional blade clamp

JR003GZ / without batteries and charger



XGT

JV002G

BL SOFT NO-LOAD

40 V max XGT® Jig saw



Constant speed control provides continuous speed during heavy cutting applications

Built-in dust blower clears the line of cut for increased accuracy

JV002GZ / without batteries and charger
JV002GD201 / with rapid charger DC40RA, 2x 2,5 Ah battery BL4025 and Makpac case



CHAIN VISE
FOR CUTTING LARGE DIAMETER PIPES



SOFT NO-LOAD
EASIER PRECISE ALIGNMENT OF THE BLADE TO THE CUTTING LINE

STAPLER DST221 - LXT®

- Ideal for installing insulation foil
- Fastens a wide range of 23 GA crown staples from 10-22 mm in height



RECIPRO SAW BLADES



Part	Diameter	Material
B-10403 ¹	455 mm	aerated concrete, brick
B-63591 ²	400 mm	aerated concrete, brick
JR003G		
E-26244 ³	260 mm	pipes ≤ Ø145 mm
E-26587 ³	350 mm	pipes ≤ Ø220 mm

B-63591

Jig saw blade, sandwich panels and steel profiles, 105 mm
JV002G




193517-1

Guide rail adapter
JV002G



1915R3-2

Support guide for precise curved and free form cutting
JV002G






XGT

LS002G

BL DXT AWS

40 V max XGT® Slide compound miter saw

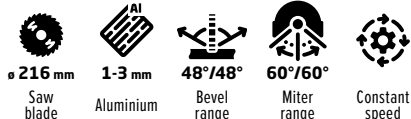

Cutting capacity: (0°) 70x312 mm, (45°) 70x220 mm

LED light casts a shadow of the saw blade onto the material as an exact cutting line

Rail-forward design to maximize work space

LS002GZ01 / without batteries and charger




XGT

LS004G

BL DXT AWS

40 V max XGT® Slide compound miter saw

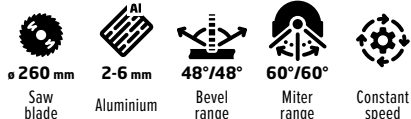

Cutting capacity: (0°) 68x310 / 91x279 mm, (45°) 68x218 / 91x197 mm

LED light casts a shadow of the saw blade onto the material as an exact cutting line

Rail-forward design to maximize work space

LS004GZ01 / without batteries and charger




XGT

LS003G

BL DXT AWS

40 V max XGT® Slide compound miter saw

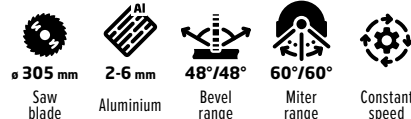

Cutting capacity: (0°) 92x382 / 107x363 mm, (45°) 92x268 / 107x255 mm

LED light casts a shadow of the saw blade onto the material as an exact cutting line

Rail-forward design to maximize work space

LS003GZ01 / without batteries and charger



**RETRACTABLE
EXTENSION WINGS
FOR CUTTING LONGER MATERIAL**

CAULKING GUN DCG180 - LXT®

- Ideal for sealing windows
- 5 speed dial optimizes flow rate
- Drip-reduction feature



B-33299

TCT saw blade, aluminium,
216 mm, 64T
LS002G



E-06323

TCT Efficut saw blade,
aluminium, 260 mm, 81T
LS004G



E-13253

TCT Efficut saw blade,
aluminium, 305 mm, 81T
LS003G



198687-1

Miter saw stand
LS002G, LS003G, LS004G






XGT VS001G

BL HEPA filter

40 V max XGT® Vacuum sweeper

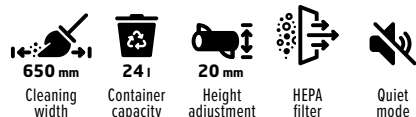

3-brush design engineered for cleaning a variety of dust and waste materials

Main brush height adjustment dial, capable of small dust materials as well as plastic bottles

Automatic self-cleaning filtration system maintaining optimal suction


VS001GZ / without batteries and charger



XGT UX01G

BL AFT

40 V max XGT® Multi function power head

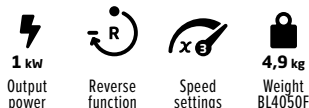

Compatible with a variety of Makita attachments for various applications

AFT® turns the motor off if rotation speed suddenly slows

Electric brake quickly stops the motor for maximum productivity

UX01GZ / without batteries and charger

UX01GZ / without batteries, charger and with brush cutter attachment



XGT DG002G

BL ADT

40 V max XGT® Earth auger



Ideal for post-hole digging, fence installation, large planting jobs and construction projects

Reverse switch for clearing earth auger bit from high resistance soil

Built-in LED light illuminates the work area

DG002GZ / without batteries and charger

DG002GM101 / with rapid charger DC40RA and 2x 4,0 Ah battery BL4040



SUCTION FUNCTION
MINIMIZES AIRBORNE DUST KICKED UP BY THE BRUSHES



ADT TECHNOLOGY
AUTOMATICALLY ADJUSTS DRILL SPEED AND TORQUE DURING DRILLING

199320-8

Brush attachment
BR400MP, 600 mm
UX01G



199341-0

Sweeper attachment
SW400MP, 590 mm
UX01G



191P76-5

Blower attachment
UB401MP, 17,3 N
UX01G



1912R8-4

Blower attachment
UB402MP, 4,7 N
UX01G



UB403MP

Blower attachment
UB403MP, 18 N
UX01G




PF400MP

Pump attachment
135 l/min
UX01G



E-25482

Earth auger drill bit,
50x800 mm
DG002G



E-25498

Earth auger drill bit,
60x800 mm
DG002G



E-25507

Earth auger drill bit,
80x800 mm
DG002G





XGT UB004G

BL
MAKITA POWER

40 V max XGT® Blower

32 N Blowing force	96 m/s Air velocity	19,1 m³/min Air volume	Speed settings	7,8 kg Weight BL4050F

Telescopic nozzle with stepless adjustment within a 250 mm range

2 battery system - the blower runs on one battery and switches to the second one when the first one runs out

UB004GZ01 / without batteries and charger



XGT UB001G

BL
MAKITA POWER

40 V max XGT® Blower

17 N Blowing force	64 m/s Air velocity	16 m³/min Air volume	Speed settings	3,9 kg Weight BL4050F

Speed lock and variable speed trigger for power and run time management

3-stage telescoping long nozzle for user convenience

Boost mode delivers 17 N for heavy debris

UB001GZ / without batteries and charger
UB001GGM101 / with rapid charger DC40RA and 2x 4,0 Ah battery BL4040



XGT UB003G

BL
MAKITA POWER

40 V max XGT® Blower - vacuum

16,0 N Blowing force	68 m/s Air velocity	13,8 m³/min Air volume	Speed settings	5,0 kg Weight BL4050F

Telescopic nozzle with stepless adjustment within a 130 mm range

Mulching blades finely shred leaves during vacuuming, reducing their volume and minimizing the frequency of bag emptying

UB003GZ / without batteries and charger



UB001G



XGT UB002G

40 V max XGT® Blower

3,1 N Blowing force	76 m/s Air velocity	3,6 m³/min Air volume	Speed settings	2,9 kg Weight BL4050F

Two nozzle options: a long nozzle ideal for clearing large open spaces, and a short nozzle perfect for cleaning workspaces

Transform it into a vacuum by attaching the short nozzle to the air inlet and fitting a dust bag onto the air outlet

UB002GZ01 / without batteries and charger



XGT UB005G

BL
MAKITA POWER

40 V max XGT® Blower - vacuum

5,0 N Blowing force	87 m/s Air velocity	3,5 m³/min Air volume	Speed settings	5,1 kg Weight BL4050F

Easily converts from blower to vacuum with mulcher

10:1 mulch ratio reduces up to 10 bags of leaves down to 1 bag with shredding blade

Speed lock and variable speed trigger for power and run time management

UB005GZ / without batteries and charger

1917R2-6 Cushion belt UB004G



197888-8 Round nozzle *use with 191L96-5 adapter UB001G



123241-2 Dust bag UB002G



1918E9-7 Wide round nozzle UB004G



197889-6 Flat nozzle *use with 191L96-5 adapter UB001G



192236-6 Tapered nozzle *use with short nozzle UB002G



1918B8-8 Wide nozzle UB005G



127759-5 Shoulder strap UB005G



1916T9-0 Vacuum kit UB003G






LXT

DCU601

18+18 V LXT® Transport trolley



Designed with adjustable front and side guards that lower below platform level, allowing easy loading and unloading without any lifting required

Loading platform dimensions (L x W): 965 x 645 mm

Adjustable handlebar height: 740-980 mm


DCU601Z / without batteries and charger



LXT

DCU602

18+18 V LXT® Transport trolley

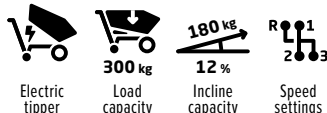

Electric tipping system tilts up to 75°, then manually adjusts up to 110°

Adjustable handlebar height: 740-980 mm

Capacity by load type: dry load 200 l / wet load 100 l


DCU602Z / without batteries and charger



XGT

GP001G

40 V max XGT® Grease gun

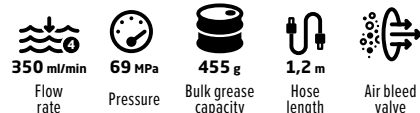

Variable speed trigger allows the user to adjust discharge rate

Lock-on button for user convenience during longer work periods

Air bleed valve assists in faster pump priming

GP001GZ / without batteries and charger




HOLDS 4 BATTERIES
BUT OPERATES ON 2, UTILIZING THE
EXTRA ONES FOR LONGER RUN TIMES



191B67-2

Pipe frame, 625-1.015 x
945-1.090 mm
DCU602



1911K4-7

Front wheel with finer
thread for outdoor surfaces
DCU601, DCU602



1915N4-2

Lock on adapter
GP001G



1916U8-9

Angle adapter
GP001G



1911M9-1

Extension pipe
GP001G



166094-6

Shoulder strap
GP001G



1915E6-5

Adapter for connecting a
500 g grease cartridge
GP001G



1914G9-7

Adapter for pumping
grease from barrel
GP001G





MODULAR SYSTEM FOR STORAGE

Introducing the next generation of modular storage systems - Makita MAKTRAK. A smart storage solution with tool cases and organizers that stacks and offers easier access and easier loading/unloading in the trunk of a pickup truck or van.

MAKTRAK tool cases keep your tools safe and within reach. The cases feature a double-hinged lid that allows access from both sides without having to unload the boxes, while the innovative horizontal design allows you to store larger tools such as nailers, saws and hammer drills.

MAKTRAK organizers are designed to keep your workspace efficient and your items within reach. Choose from deep mid, low mid and deep compact organizers, all designed with maximum durability and storage efficiency in mind.



P-91001

Transport tool case

Lid with dual hinges allows easy access from both sides
Durable handle extends up to 387 mm for easier transport

Carrying capacity	113 kg
Volume	81,9 l
Dimensions (L x W x H)	1.011 x 565 x 295 mm
Weight	17,44 kg



P-91017

Large tool case

Lid with dual hinges allows easy access from both sides
Removable tray designed for organized storage of tools and accessories.

Carrying capacity	45 kg
Volume	63 l
Dimensions (L x W x H)	802 x 565 x 252 mm
Weight	10,11 kg



P-91023

Deep tool case

Lid with dual hinges allows easy access from the top
Two stacking options; attach to the side or top of the transport tool case

Carrying capacity	45 kg
Volume	58,4 l
Dimensions (L x W x H)	394 x 565 x 402 mm
Weight	7,21 kg



P-91039

Medium tool case

2 removable trays for storing tools, accessories, batteries, chargers and small parts

Carrying capacity	34 kg
Volume	18,4 l
Dimensions (L x W x H)	387 x 562 x 161 mm
Weight	4,45 kg



P-91045

Deep medium organiser

Clear lid to easily see inside and rib design secures bins in place
127 mm deep bins

Carrying capacity	22,6 kg
Volume	18,4 l
Dimensions (L x W x H)	387 x 562 x 163 mm
Weight	4,87 kg



P-91051

Low medium organiser

Clear lid to easily see inside and rib design secures bins in place

Volume	8,14 l
Dimensions (L x W x H)	387 x 596 x 85 mm
Weight	2,89 kg



P-91067

Deep compact organiser


Clear lid to easily see inside and rib design secures bins in place
127 mm deep bins

Volume	8,55 l
Dimensions (L x W x H)	278 x 389 x 162 mm
Weight	2,59 kg



XGT LXT EUAML014G

XGT®/LXT® LED light on stand

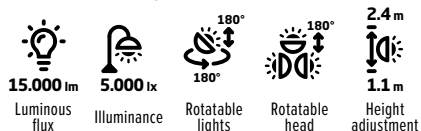

Stepless brightness adjustment 1.100-15.000 lm

Foldable design for quick setup and takedown

The light's feet can be anchored to the ground to prevent tipping

EUAML014G / without batteries and charger



ML010G




ML011G

LARGE RANGE OF CORDLESS LIGHTS



XGT LXT ML010G

XGT®/LXT® LED area light

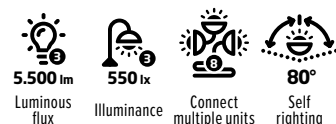

3 illumination modes: 360°, left 180° and right 180°

AC inlet and outlet can be used to chain multiple lights together


IP54 water and dust protection

ML010G / without batteries and charger



XGT LXT DEAML009G

XGT®/LXT® LED work light

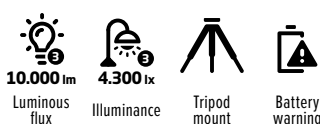

Compatible with 40V max XGT® or 18V LXT® batteries

Adjusting knobs enable the user to direct the flood light to desired angle


Carrying handle folds down for convenience

DEAML009G / without batteries and charger



XGT LXT ML005G

XGT®/LXT® LED work light

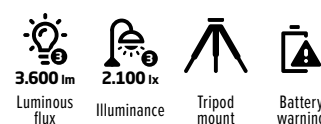

Compatible with 40V max XGT® or 18V LXT® batteries

Adjusting knobs enable the user to direct the flood light to desired angle

Carrying handle folds down for convenience

ML005G / without batteries and charger
ML005GX / without batteries and charger and with lamp shade

GM00001396

Vise
ML013G, ML005G,
DEAML009G



GM00002358

Light shade
ML005G



GM00002359

Shade foil
ML005G



TD00000167

Adapter for vise
ML013G




GM00002377

Light shade
DEAML009G



GM00002376

Shade foil
DEAML009G



GM00002378


Tripod for 1 or 2 lights,
1.300-2.000 mm
ML005G, DEAML009G





XGT **ML012G**

40 V max XGT® LED light

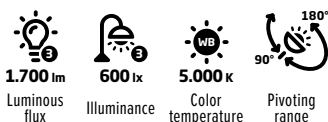

The LED light bar section folds in half for double-sided illumination and compact storage or transport

Telescopic hook, top hook and 3 strap holes provide multiple mounting options


7 adjustable rotating illumination angles (-90°–180°)

ML012G / without batteries and charger



XGT **ML013G**

40 V max XGT® LED magnetic light

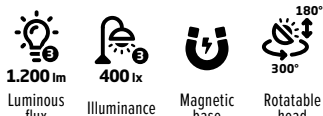

Easily deactivate the magnetic base with the magnet cover

Multiple mounting options: magnetic base or hanging hook


The light head folds 180° and turns off automatically when fully closed

ML013G / without batteries and charger



XGT **ML007G**

40 V max XGT® LED flashlight

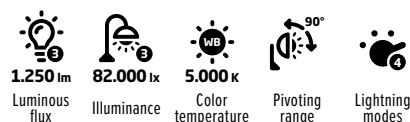

4 lighting modes: (spot mode / spot-flood mode / flood mode / strobe mode)

Adjustable head: 90° up / down


Battery capacity warning function

ML007G / without batteries and charger



XGT **ML011G**

40 V max XGT® LED compact light



Built-in USB port for charging portable electronic devices

Compact size of 107x50 mm - LxH without battery

3 illumination modes: top+side lights / top light / side light

ML011G / without batteries and charger



LXT **DML817**

18 V LXT® LED compact light



Built-in USB port for charging portable electronic devices

Compact size of 107x50 mm - LxH without battery

3 illumination modes: top+side lights / top light / side light

DML817 / without batteries and charger



XGT **LXT** **DC** **AC** **MR014G**

XGT®/ LXT®/ AC Bluetooth speaker



Bluetooth® 5.1 delivers up to 100 m range for connectivity throughout the job site

With AUX-in jack and USB-out port for charging smart devices

MR014GZ / without batteries and charger

ADP001



Adapter for USB charging

Mount the ADP001G onto your 40 V max XGT® battery and turn it into a charging adapter for 2 smart devices.

2x USB port type A - 2,4 A



DECADP05



Adapter for USB charging

Mount the DECADP05 onto your 18 V LXT® battery and turn it into a charging adapter for 2 smart devices.

2x USB port type A - 2,1 A



ADP12



XGT® Communication adapter

ADP12 helps you manage your XGT tools and batteries by connecting them to a PC or phone.

Add PIN anti-theft protection

Schedule operating time

Check tool or battery history

Add notes





Makita BELGIUM
Jan-Baptist Vinkstraat 2
3070 Kortenberg
csd@makita.be



SPECIALITY TOOLS FOR INCREASED SPEED AND EFFICIENCY ON THE JOB SITE